

ENGINEERING TRIPOS PART IIA

---

Friday 11 May 2007 2:30 to 4

---

Module 3C4

MACHINE DESIGN - TRANSMISSIONS

*Answer not more than three questions.*

*All questions carry the same number of marks.*

*The **approximate** percentage of marks allocated to each part of a question is indicated in the right margin.*

*Attachments:*

*Special datasheet (10 pages).*

STATIONERY REQUIREMENTS

Single-sided script paper

Graph paper × 2 sheets

SPECIAL REQUIREMENTS

Engineering Data Book

CUED approved calculator allowed

**You may not start to read the  
questions printed on the subsequent pages  
of this question paper until instructed that  
you may do so by the Invigilator**

1 (a) Explain why epicyclic gears are commonly used in vehicle automatic transmissions. [15%]

(b) Figure 1 shows a schematic of the Wilson epicyclic compound gear for use in an automatic car, which comprises three epicyclic gears. Input is to the two rigidly connected sun wheels  $S_2$  and  $S_3$  rotating at  $\omega_i$  and output is from the planet carrier  $C_3$  rotating at  $\omega_o$ . Sun wheel  $S_1$  rides freely on the input shaft. There are rigid connections between  $C_1$  and  $A_2$ , and between  $A_1$ ,  $C_2$  and  $A_3$ , as shown.

(i) In third gear, sun wheel  $S_1$  is held fixed. Derive an expression for the ratio of input to output speeds  $\omega_i/\omega_o$  in terms of the ratios  $R_1 = A_1/S_1$ ,  $R_2 = A_2/S_2$  and  $R_3 = A_3/S_3$  of the tooth numbers on the respective annulus and sun wheels. Calculate  $\omega_i/\omega_o$  for  $R_1 = 2.5$ ,  $R_2 = 3.5$  and  $R_3 = 3$ . [50%]

(ii) Calculate the fraction of the total power transmitted through sun wheel  $S_3$  in third gear for the values of  $R_1$ ,  $R_2$  and  $R_3$  given in (b)(i). [25%]

(iii) How might the transmission system be modified to improve the car's efficiency? [10%]

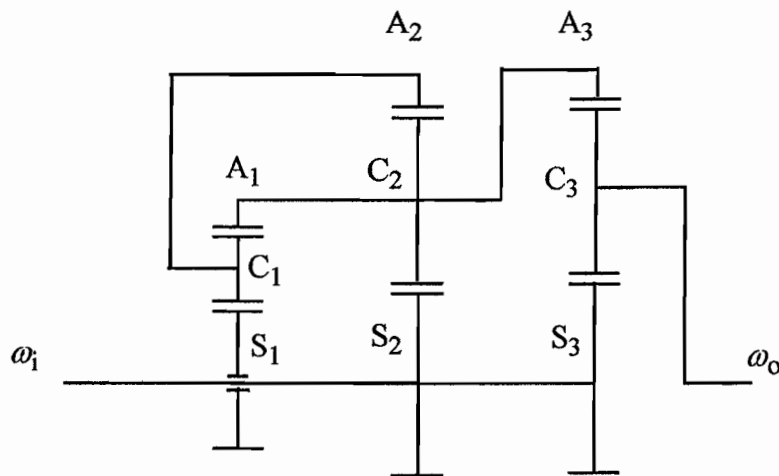


Fig. 1

2 Figure 2 shows schematically a cylindrical cam mechanism for lifting a mass  $m$  in a weaving machine. Gravitational forces can be neglected. The cam rotates at constant angular speed  $\omega$  about  $O$  while the roller follower of radius  $R/2$  is maintained in contact with the cam by a soft spring with restoring force  $F$ . The base circle of the cam has been fixed at a radius  $R$  but the rest of the cam profile is to be designed. The cam and follower have an effective contact modulus  $E^*$  and the length of the line contact between the cam and follower is  $\ell$ .

Figure 3 shows the required lift curve giving the lift  $x$  of the mass, relative to its position when the follower rests on the base circle, as a function of cam rotation angle  $\theta$ . The lift curve is symmetrical about  $\theta = \pi$ . Regions where the mass is stationary are connected by a transition curve given by the sinusoidal function

$$x = \frac{R}{4} \{1 + \sin(2\theta - \pi)\} \quad \text{for } \pi/4 < \theta < 3\pi/4.$$

(a) Describe how a cam profile can be constructed for a given lift curve. Draw a careful sketch of the cam profile needed for the required lift curve. [35%]

(b) Derive an expression, in terms of  $R$ ,  $\omega$  and  $m$ , for the minimum spring force needed to maintain contact between the cam and follower with the given lift curve. [35%]

(c) Derive an approximate expression for the maximum Hertzian contact pressure between the cam and follower as a function of  $R$ ,  $\ell$ ,  $\omega$ ,  $F$ ,  $E^*$  and  $m$  with the given lift curve. Use your sketch from part (a) to estimate the appropriate cam radius needed in your calculation of the contact pressure. [30%]

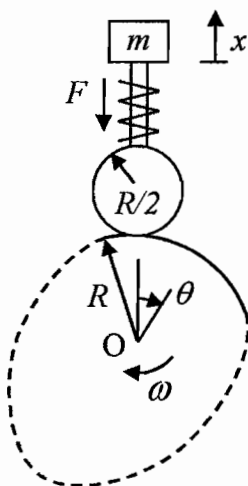


Fig. 2

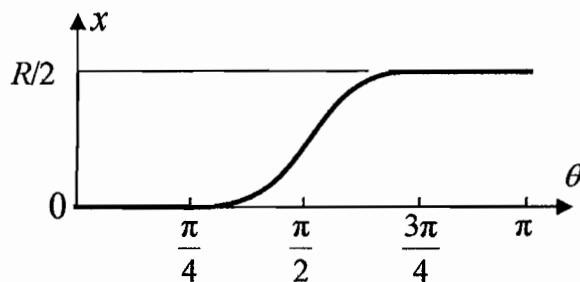


Fig. 3

(TURN OVER)

3 Figure 4 shows schematically a crushing roll, of diameter 300 mm, driven by a chain drive to which an effective force  $P$  of magnitude 10 kN is applied. The roll is in contact with a similar roll which applies a uniformly distributed load, as indicated, of magnitude  $20 \text{ kN m}^{-1}$ . The shaft which supports the roll has a diameter of 45 mm and rotates at a speed of 350 rpm. Bearings are to be selected for fitting at positions A and B and will be supplied with a lubricant of kinematic viscosity  $100 \text{ mm}^2 \text{ s}^{-1}$ . The required life of the bearings is 10,000 hours with a 95% reliability.

(a) To simplify the design it is assumed that both bearings are to be the same. Select a deep groove ball bearing from the data sheet which will meet the design requirements. [45%]

(b) A change in operation leads to the shaft being subject to an additional axial load of magnitude 1.2 kN directed from left to right while the other operational conditions remain the same. The axial load is to be reacted by the bearing at A and the requirement for bearings A and B to be the same is relaxed. Suggest appropriate bearings for A and B. It can be assumed that the equivalent radial force on a bearing is equal to the sum of the magnitudes of the radial and axial forces. [45%]

(c) Suggest what other initial calculations could be carried out on this arrangement prior to the start of detail design. What particular features of the embodiment would be significant in this application? [10%]

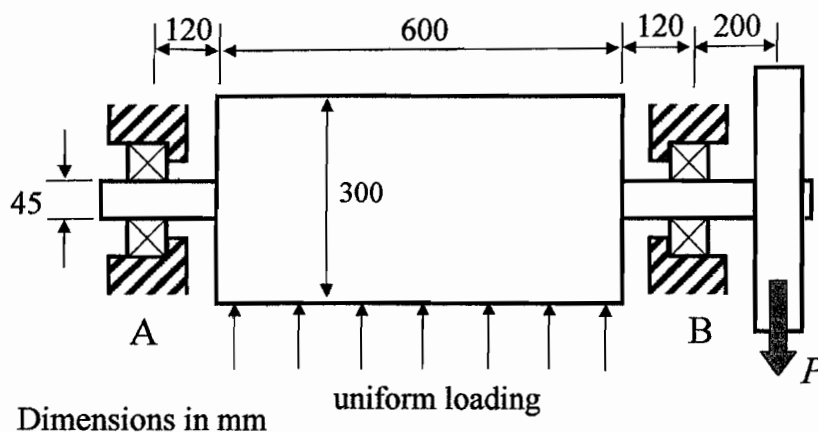


Fig. 4

4 (a) Explain what are meant by performance characteristics, and how they can be used for power matching in mechanical power transmission. Illustrate your answer with an example of typical source and load characteristics (not using the characteristics described in subsequent parts of this question). [25%]

(b) A snow blower is designed to cut packed snow from a pavement and blow it to the side. The depth of cut of the blower can be varied.

(i) Briefly outline the operation of an appropriate hydrostatic variable speed drive connecting an internal combustion engine to the cutter. Explain why this might be an appropriate solution for the transmission system. [25%]

(ii) An alternative transmission system uses an electric DC motor operating at a fixed voltage with a maximum speed of  $200 \text{ rad s}^{-1}$ . The motor is connected directly to the cutter so that the torque and speed of the motor are the same as those of the cutter. The cutter and motor torques  $T_C$  and  $T_M$ , respectively (both in N m), depend on the depth of cut  $h$  (in mm) and the rotational speed  $\omega$  (in  $\text{rad s}^{-1}$ ) in the following way:

$$T_C = 3h - \omega/5 \quad \text{and} \quad T_M = 2000/\omega.$$

Show that, for a depth of cut  $h = 20 \text{ mm}$ , the cutter speed approximately equals  $38.2 \text{ rad s}^{-1}$ . Sketch the motor and load characteristics for  $0 < \omega < 200 \text{ rad s}^{-1}$  and  $h = 20 \text{ mm}$ . [25%]

(iii) Sketch how the cutter speed will vary as the depth of cut is steadily reduced from  $20 \text{ mm}$  to zero. Comment on this behaviour. [25%]

**END OF PAPER**

## ENGINEERING TRIPOS Part IIA

### Modules 3C3 and 3C4 Data Sheet

#### HYDRODYNAMIC LUBRICATION

##### Viscosity: temperature and pressure effects

$$\text{Vogel formula } \eta = \eta_0 \exp\left\{\frac{b}{T + T_c}\right\}$$

$$\text{Barus equation } \eta = \eta_0 \exp\{\alpha p\}$$

$$\text{Roelands equation } \eta = \eta_0 \exp\left\{9.67 + \ln \eta_0 \left[\left(1 + \frac{p}{p_0^*}\right)^\beta - 1\right]\right\}$$

##### Viscous pressure flow

Rate of flow  $q_x$  per unit width of fluid of viscosity  $\eta$  down a channel of height  $h$  due to

$$\text{pressure gradient, } q_x = -\frac{h^3}{12\eta} \frac{dp}{dx}$$

##### Reynolds' Equation for a steady configuration

$$\text{1-D flow: } \frac{dp}{dx} = 12\eta\bar{U} \left\{ \frac{h - h^*}{h^3} \right\}$$

$\bar{U}$  is the entraining velocity so that  $|\bar{U}h^*|$  is flow per unit width through the contact.

$$\text{2-D flow: } \frac{\partial}{\partial x} \left\{ \frac{h^3}{\eta} \frac{\partial p}{\partial x} \right\} + \frac{\partial}{\partial y} \left\{ \frac{h^3}{\eta} \frac{\partial p}{\partial y} \right\} = 12\bar{U} \frac{\partial h}{\partial x}$$

##### Hydrodynamic lubrication of discs

$$\frac{h}{R} = C \frac{\eta\bar{U}}{W'} \quad \text{where } R \text{ is the reduced or effective radius and } W' \text{ the load per unit length}$$

$$C_{\min} = 4.00 \quad \text{for half Sommerfeld boundary conditions}$$

$$C_{\min} = 4.89 \quad \text{for half Reynolds' boundary conditions}$$

## ELASTIC CONTACT STRESS FORMULAE

Suffixes 1, 2 refer to the two bodies in contact.

Effective curvature  $\frac{1}{R} = \frac{1}{R_1} + \frac{1}{R_2}$

where  $R_1, R_2$  are the radii of curvature of the two bodies (convex positive).

Contact modulus  $\frac{1}{E^*} = \frac{1-\nu_1^2}{E_1} + \frac{1-\nu_2^2}{E_2}$

where  $E_1, E_2$  and  $\nu_1, \nu_2$  are Young's moduli and Poisson's ratios.

	<u>Line contact</u>	<u>Circular contact</u>
	(width $2b$ ; load $W'$ per unit length)	(diameter $2a$ ; load $W$ )
Semi contact width or contact radius	$b = 2 \left\{ \frac{W'R}{\pi E^*} \right\}^{1/2}$	$a = \left\{ \frac{3WR}{4E^*} \right\}^{1/3}$
Maximum contact pressure ("Hertz stress")	$p_0 = \left\{ \frac{W'E^*}{\pi R} \right\}^{1/2}$	$p_0 = \frac{1}{\pi} \left\{ \frac{6WE^{*2}}{R^2} \right\}^{1/3}$
Approach of centres	$\delta = \frac{2W'}{\pi} \left[ \frac{1-\nu_1^2}{E_1} \left\{ \ln \left( \frac{4R_1}{b} \right) - \frac{1}{2} \right\} + \frac{1-\nu_2^2}{E_2} \left\{ \ln \left( \frac{4R_2}{b} \right) - \frac{1}{2} \right\} \right]$	$\delta = \frac{a^2}{R} = \frac{1}{2} \left\{ \frac{9}{2} \frac{W^2}{E^{*2} R} \right\}^{1/3}$
Mean contact pressure	$\bar{p} = \frac{W'}{2b} = \frac{\pi}{4} p_0$	$\bar{p} = \frac{W}{\pi a^2} = \frac{2}{3} p_0$
Maximum shear stress	$\tau_{\max} = 0.300 p_0$ at $(x = 0, z = 0.79b)$	$\tau_{\max} = 0.310 p_0$ at $(r = 0, z = 0.48a)$ for $\nu = 0.3$
Maximum tensile stress	zero	$\frac{1}{3}(1-2\nu)p_0$ at $(r = a, z = 0)$

### Mildly elliptical contacts


If the gap at zero load is  $h = \frac{1}{2}Ax^2 + \frac{1}{2}By^2$ , and  $0.2 < A/B < 5$

Ratio of semi-axes  $b/a \cong (A/B)^{2/3}$

To calculate the contact **area** or Hertz **stress** use the circular contact equations with  $R = (AB)^{-1/2}$  or better  $R_e = [AB(A+B)/2]^{-1/3}$ .

For **approach** use circular contact equation with  $R = (AB)^{-1/2}$  (not  $R_e$ )

### Hertzian contact frictional losses

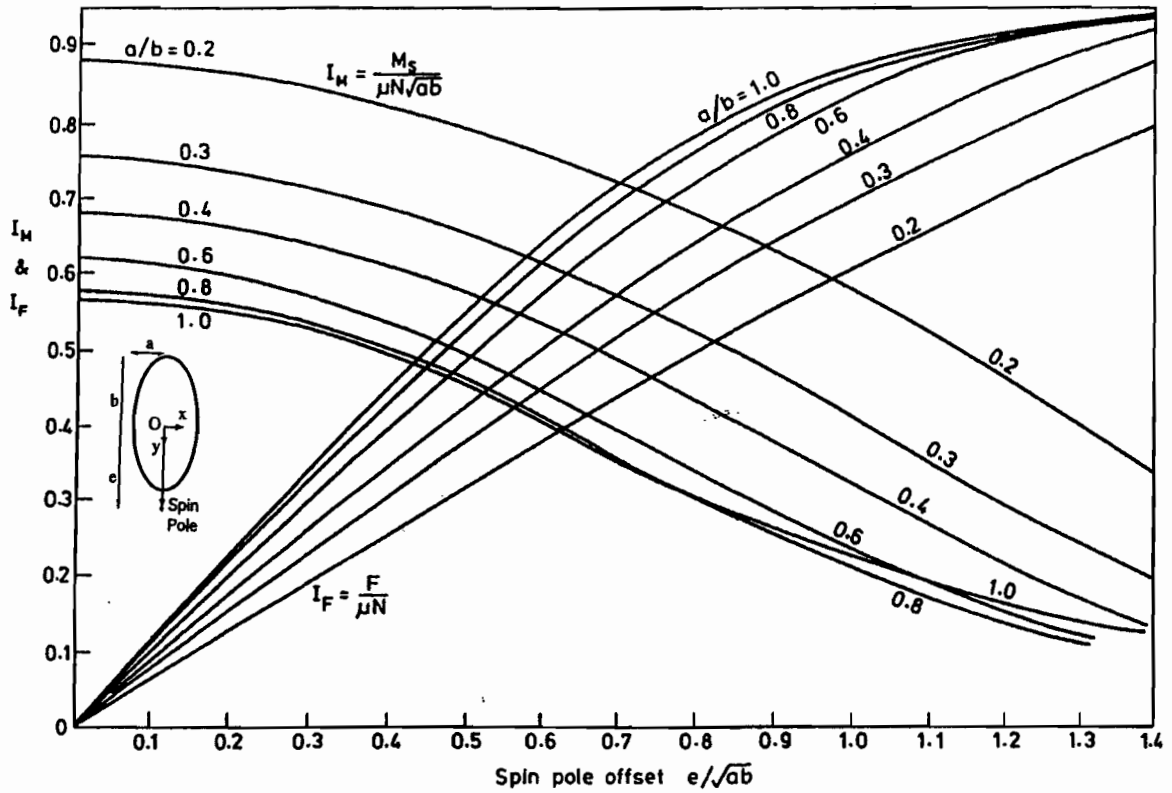

### INVOLUTE GEARING


#### Spur gears

pitch cylinder radii  $r$   
 base cylinder radii  $r_b$   
 addendum cylinder radii  $r_a$   
 number of teeth  $N$   
 addendum  $a = r_a - r$   
 pressure angle  $\phi$

} with suffix 1 or 2

circumferential pitch  $p = 2\pi r/N$   
 base pitch  $p_b = p \cos \phi$   
 module  $m = p/\pi = 2r/N$   
 ratio of contact  $r_c$   
 radius of curvature at pitch point  $\rho = r \sin \phi$

#### Path of contact

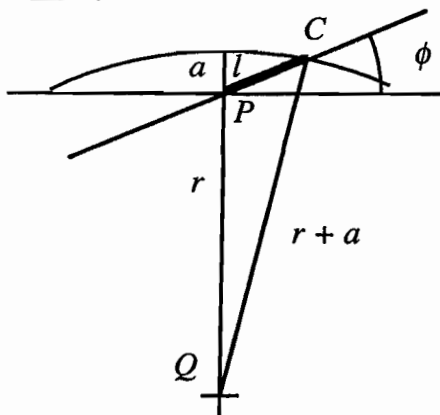

$$l = \left\{ r^2 \sin^2 \phi + a(2r + a) \right\}^{1/2} - r \sin \phi$$

For a standard 20° spur wheel with  $N$  teeth of module  $m$  this becomes

$$\frac{l}{m} = \left( 0.02924N^2 + N + 1 \right)^{1/2} - 0.1710N$$



Standard tooth forms

Addendum  $a = m$ , Dedendum  $= \frac{7}{6}m$ , pressure angle  $= 20^\circ$ .

Modules: 0.3 – 1.0 mm in 0.1 mm steps  
 1.0 – 4.0 mm in 0.25 mm steps 4.0 – 7.0 mm in 0.5 mm steps  
 7.0 – 16.0 mm in 1.0 mm steps 16.0 – 24.0 mm in 2.0 mm steps  
 24.0 – 45.0 mm in 3.0 mm steps 45.0 – 75.0 mm in 5.0 mm steps


Friction in spur gears

$$\frac{\text{average friction loss}}{\text{power transmitted}} \approx \mu\pi \left\{ \frac{1}{N_1} + \frac{1}{N_2} \right\}$$

Tooth failure

Allowable bending stress  $\sigma_b$  according to AGMA guidelines given by  $\sigma_b = \frac{P'_T}{Jm}$

where  $P'_T$  is force per unit face-width acting tangentially to pitch circle and  $J$  given in the figure below for  $20^\circ$  spur gears. Typical values of  $\sigma_b$  shown in table.

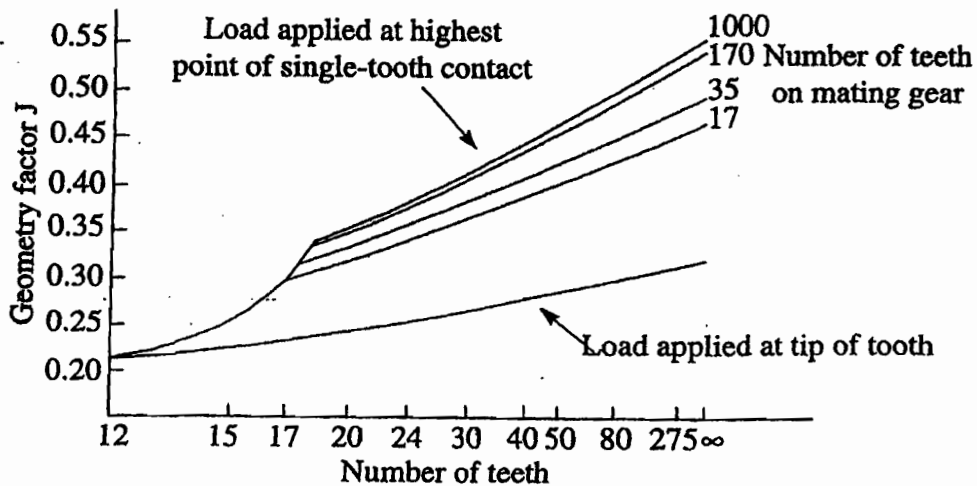

Typical allowable tooth stresses (AGMA)

Material	Condition	Bending fatigue strength $\sigma_b$ (MPa)	Surface fatigue strength $\sigma_s$ (MPa)
Steel	Through hardened and tempered	170-390	590-1200
	Carburised and case hardened	380-480	1250-1550
Cast iron	As cast	69-90	450-590
Nodular iron	Quenched, annealed and tempered	150-300	500-800
Malleable iron	Pearlitic	70-145	500-650

## EPICYCLIC SPEED RULE

$$\omega_s = (1 + R)\omega_c - R\omega_a \quad \text{where } R = \frac{A}{S}$$

## ROLLING ELEMENT BEARINGS

### Fatigue life

$$L = a_1 a_2 a_3 (C/P)^p \quad p = 3 \text{ for ball and } 10/3 \text{ for roller bearings}$$

Fatigue probability %	10	5	4	3	2	1
Life adjust factor $a_1$	1	0.62	0.53	0.44	0.33	0.21

### Minimum radial load $F_{rm}$

$$\text{For a ball bearing } F_{rm} = k_r \left( \frac{vn}{1000} \right)^{2/3} \left( \frac{d_m}{100} \right)^2$$



$$\text{For a roller bearing } F_{rm} = k_r \left( 6 + \frac{4n}{n_r} \right) \left( \frac{d_m}{100} \right)^2$$

$F_{rm}$  is the minimum radial load in N,  $d_m$  is the mean bearing diameter in mm,  $v$  is the kinematic viscosity in  $\text{mm}^2\text{s}^{-1}$ ,  $n$  the speed in rpm and  $n_r$  the limiting speed for oil lubrication.  $k_r$  is typically 25 for ball bearings and 150 for roller bearings.


### Bearing choice

The information on the following pages concerning minimum loads, viscosities and standard bearing sizes and ratings is extracted from the SKF General Bearing Catalogue and is copied with permission. It is SKF copyright and is not to be further reproduced.


Required viscosities and the effect of viscosity ratio on  $a_{23}$

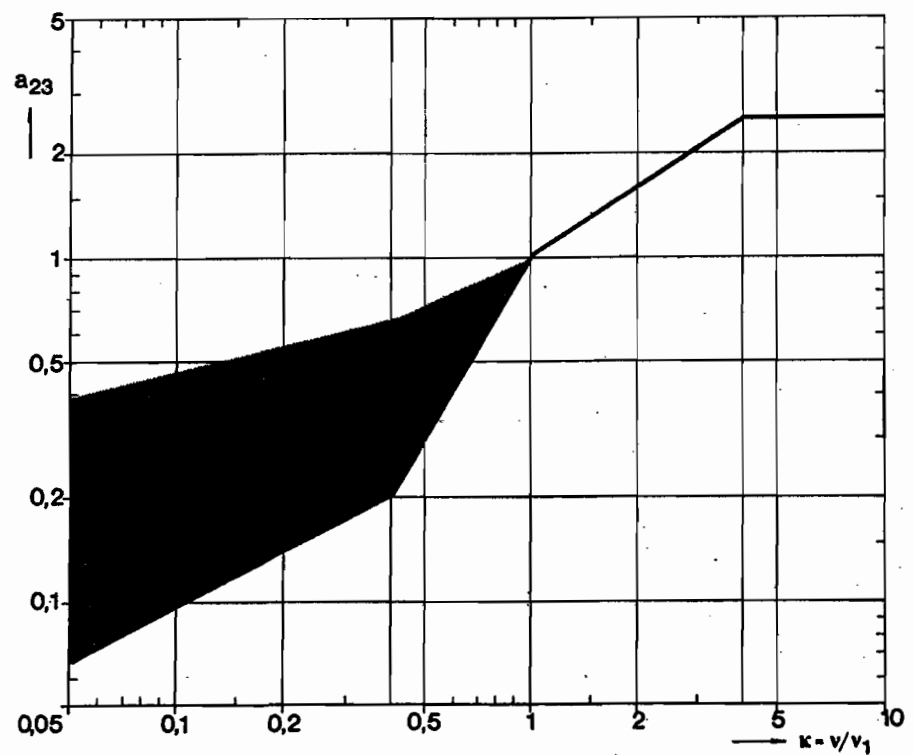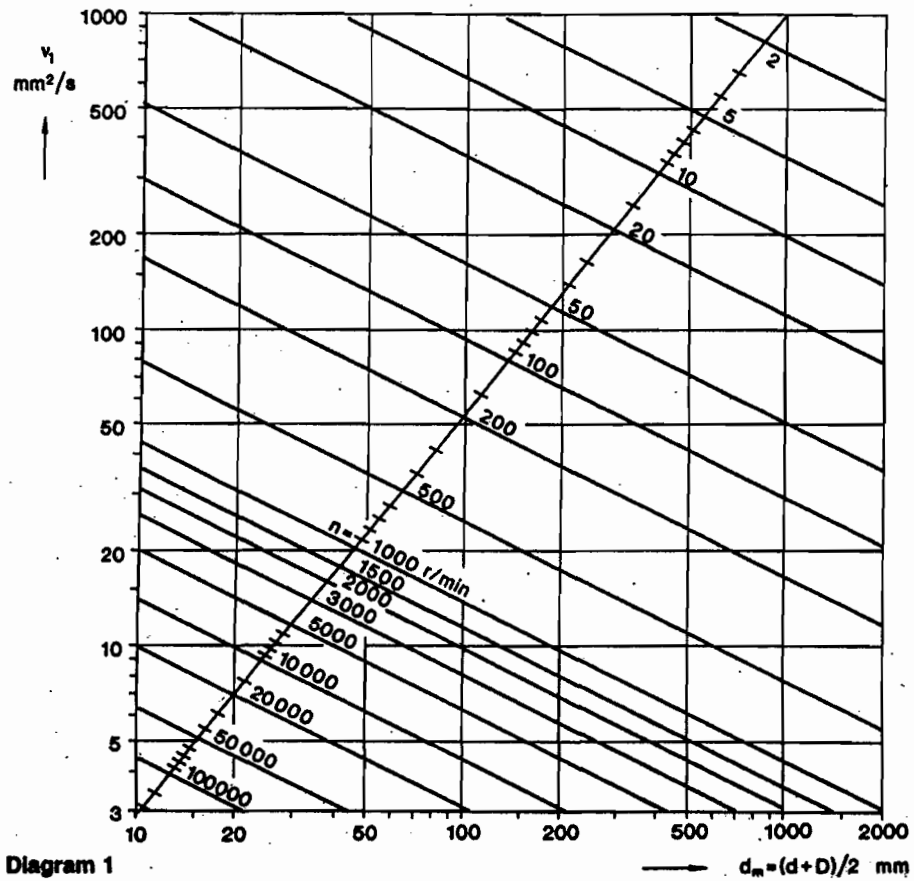

**Deep groove ball bearings  
single row  
d 35-55 mm**




With full outer ring shoulders



With recessed outer ring shoulders


Principal dimensions	Basic load ratings			Fatigue load limit $P_u$	Speed ratings Lubrication grease oil	Mass	Designation
	d	D	B				
35	47	7	4 750	3 200	186	13 000	61807
	55	10	9 560	6 200	290	16 000	61907
	62	9	12 400	8 150	375	14 000	16007
	62	14	15 900	10 200	440	13 000	6007
	72	17	25 500	15 300	655	9 000	6207
	80	21	33 200	19 000	815	8 500	6307
	100	25	55 300	31 000	1 290	7 000	6407
40	52	7	4 940	3 450	186	11 000	61808
	62	12	13 800	9 300	425	10 000	61908
	68	9	13 300	9 150	440	12 000	16008
	68	15	16 800	11 600	490	9 500	6008
	80	18	30 700	19 000	800	8 500	6208
	90	23	41 000	24 000	1 020	7 500	6308
	110	27	63 700	36 500	1 530	6 700	6408
45	58	7	6 050	4 300	228	12 000	61809
	68	12	10 100	6 700	285	9 000	61909
	75	10	15 600	10 800	520	9 000	16009
	75	16	20 800	14 800	640	11 000	6009
	85	19	33 200	21 600	915	7 500	6209
	100	25	52 700	31 500	1 340	6 000	6309
	120	29	76 100	45 000	1 900	5 000	6409
50	65	7	6 240	4 750	250	11 000	61810
	72	12	14 600	10 400	500	8 500	61910
	80	10	16 300	11 400	560	10 000	16010
	80	16	21 600	16 000	710	8 500	6010
	90	20	35 100	23 200	980	7 000	6210
	110	27	61 600	38 000	1 600	6 300	6310
	130	31	87 100	52 000	2 200	5 300	6410
55	72	9	8 320	6 200	325	8 500	61811
	80	13	15 900	11 400	560	9 500	61911
	90	11	19 500	14 000	695	7 500	6011
	90	18	28 100	21 200	900	7 500	6211
	100	21	43 600	29 000	1 250	6 300	6311
	120	29	71 500	45 000	1 900	5 600	6411
	140	33	99 500	62 000	2 600	5 000	6511

**Angular contact ball bearings  
single row  
d 10-65 mm**




Principal dimensions	Basic load ratings			Fatigue load limit $P_u$	Speed ratings Lubrication grease oil	Mass	Designation
	d	D	B				
10	30	9	7 020	3 350	140	19 000	7200 BE
12	32	10	7 610	3 800	160	18 000	7201 BE
	37	12	10 800	5 000	208	17 000	7301 BE
15	35	11	8 840	4 800	204	17 000	7202 BE
	42	13	13 000	6 700	280	15 000	7302 BE
17	40	12	11 100	6 100	260	15 000	7203 BE
	47	14	15 900	8 300	355	13 000	7303 BE
20	47	14	14 000	8 300	355	12 000	7204 BE
	52	15	19 000	10 400	440	11 000	7304 BE
25	52	15	15 600	10 200	430	10 000	7205 BE
	62	17	26 000	15 800	655	9 000	7305 BE
30	62	16	23 800	15 600	655	8 500	7206 BE
	72	19	34 500	21 200	900	8 000	7306 BE
35	72	17	30 700	20 800	880	8 000	7207 BE
	80	21	39 000	24 500	1 040	7 500	7307 BE
40	80	18	36 400	26 000	1 100	7 000	7208 BE
	90	23	49 400	33 500	1 400	6 700	7308 BE
45	85	19	37 700	28 000	1 200	6 700	7209 BE
	100	25	60 500	41 500	1 750	6 000	7309 BE
50	90	20	39 000	30 500	1 290	6 000	7210 BE
	110	27	74 100	51 000	2 200	5 300	7310 BE
55	100	21	48 800	38 000	1 630	5 600	7211 BE
	120	29	85 200	60 000	2 550	4 800	7311 BE
60	110	22	57 200	45 500	1 930	5 000	7212 BE
	130	31	95 600	69 800	3 000	4 500	7312 BE
65	120	23	68 300	54 000	2 280	4 500	7213 BE
	140	33	108 000	80 000	3 350	4 300	7313 BE

**Cylindrical roller bearings  
single row  
d 40-45 mm**

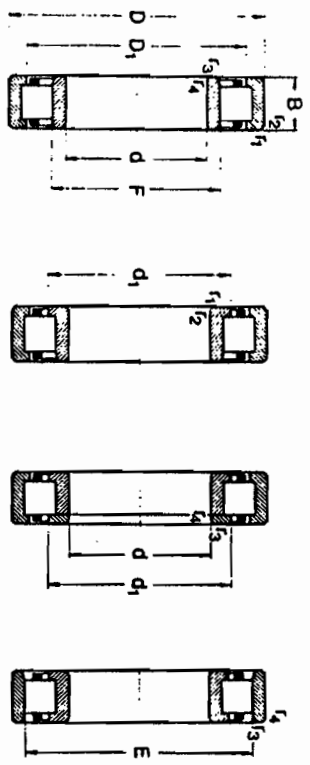


Principal dimensions	d	D	B	C	C <sub>0</sub>	Fatigue load limit P <sub>u</sub>	Speed ratings Lubrication grease oil	Mass	Designation	Type NU		Type NUP		Type N	
										N	r/min	N	r/min	N	r/min
40 (cont.)	90	23	80 900	78 000	10 200	6 700	8 000	0.65	NU 308 EC						
	90	23	80 900	78 000	10 200	6 700	8 000	0.67	NJ 308 EC						
	90	23	80 900	78 000	10 200	6 700	8 000	0.68	NUP 308 EC						
	90	23	80 900	78 000	10 200	6 700	8 000	0.64	N 308 EC						
	90	33	112 000	120 000	15 300	6 300	7 500	0.94	NU 2308 EC						
	90	33	112 000	120 000	15 300	6 300	7 500	0.96	NJ 2308 EC						
	90	33	112 000	120 000	15 300	6 300	7 500	0.98	NUP 2308 EC						
	110	27	96 800	90 000	11 600	6 000	7 000	1.30	NU 408						
	110	27	96 800	90 000	11 600	6 000	7 000	1.30	NJ 408						
	110	27	96 800	90 000	11 600	6 000	7 000	1.35	NUP 408						
	75	16	44 600	52 000	6 300	9 000	11 000	0.26	NU 1009 EC						
	85	19	60 500	64 000	8 150	6 700	8 000	0.43	NU 209 EC						
	85	19	60 500	64 000	8 150	6 700	8 000	0.44	NJ 209 EC						
	85	19	60 500	64 000	8 150	6 700	8 000	0.45	NUP 209 EC						
	85	19	60 500	64 000	8 150	6 700	8 000	0.43	N 209 EC						
	85	23	73 700	81 500	10 600	6 700	8 000	0.52	NU 2209 EC						
	85	23	73 700	81 500	10 600	6 700	8 000	0.54	NJ 2209 EC						
	85	23	73 700	81 500	10 600	6 700	8 000	0.55	NUP 2209 EC						
	85	23	73 700	81 500	10 600	6 700	8 000	0.52	N 2209 EC						
	100	25	99 000	100 000	12 900	6 300	7 500	0.90	NU 309 EC						
	100	25	99 000	100 000	12 900	6 300	7 500	0.92	NJ 309 EC						
	100	25	99 000	100 000	12 900	6 300	7 500	0.95	NUP 309 EC						
	100	25	99 000	100 000	12 900	6 300	7 500	0.88	N 309 EC						
	100	36	138 000	153 000	20 000	5 600	6 700	1.30	NU 2309 EC						
	100	36	138 000	153 000	20 000	5 600	6 700	1.30	NJ 2309 EC						
	100	36	138 000	153 000	20 000	5 600	6 700	1.35	NUP 2309 EC						
	120	29	106 000	102 000	13 400	5 600	6 700	1.65	NU 409						
	120	29	106 000	102 000	13 400	5 600	6 700	1.65	NJ 409						
	120	29	106 000	102 000	13 400	5 600	6 700	1.70	NUP 409						

**Cylindrical roller bearings  
single row  
d 50-55 mm**

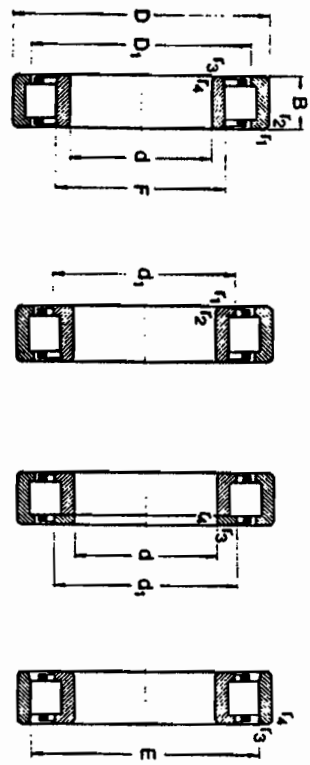


Principal dimensions	d	D	B	C	C <sub>0</sub>	Fatigue load limit P <sub>u</sub>	Speed ratings Lubrication grease oil	Mass	Designation	Type NU		Type NUP		Type N	
										N	r/min	N	r/min	N	r/min
50	80	16	30 800	34 500	4 000	8 500	10 000	0.31	NU 1010						
	80	20	64 400	69 500	8 800	6 300	7 500	0.48	NU 210 EC						
	80	20	64 400	69 500	8 800	6 300	7 500	0.49	NJ 210 EC						
	80	20	64 400	69 500	8 800	6 300	7 500	0.51	NUP 210 EC						
	80	20	64 400	69 500	8 800	6 300	7 500	0.48	N 210 EC						
	90	23	78 100	88 000	11 400	6 300	7 500	0.56	NU 2210 EC						
	90	23	78 100	88 000	11 400	6 300	7 500	0.58	NJ 2210 EC						
	90	23	78 100	88 000	11 400	6 300	7 500	0.59	NUP 2210 EC						
	110	27	110 000	112 000	15 000	5 000	6 000	1.15	NU 310 EC						
	110	27	110 000	112 000	15 000	5 000	6 000	1.15	NJ 310 EC						
	110	27	110 000	112 000	15 000	5 000	6 000	1.20	NUP 310 EC						
	110	27	110 000	112 000	15 000	5 000	6 000	1.15	N 310 EC						
	110	40	161 000	186 000	24 500	5 000	6 000	1.70	NU 2310 EC						
	110	40	161 000	186 000	24 500	5 000	6 000	1.75	NJ 2310 EC						
	110	40	161 000	186 000	24 500	5 000	6 000	1.80	NUP 2310 EC						
	130	31	130 000	127 000	16 600	5 000	6 000	2.00	NU 410						
	130	31	130 000	127 000	16 600	5 000	6 000	2.05	NJ 410						
	55	18	57 200	69 500	8 300	7 000	8 500	0.40	NU 1011 EC						
	100	21	84 200	95 000	12 200	6 000	7 000	0.66	NU 211 EC						
	100	21	84 200	95 000	12 200	6 000	7 000	0.67	NJ 211 EC						
	100	21	84 200	95 000	12 200	6 000	7 000	0.69	NUP 211 EC						
	100	21	84 200	95 000	12 200	6 000	7 000	0.66	N 211 EC						
	100	25	98 000	118 000	15 300	6 000	7 000	0.79	NU 2211 EC						
	100	25	98 000	118 000	15 300	6 000	7 000	0.81	NJ 2211 EC						
	100	25	98 000	118 000	15 300	6 000	7 000	0.82	NUP 2211 EC						
	100	25	98 000	118 000	15 300	6 000	7 000	0.79	N 2211 EC						
	120	29	138 000	143 000	18 800	4 800	5 600	1.45	NU 311 EC						
	120	29	138 000	143 000	18 800	4 800	5 600	1.50	NJ 311 EC						
	120	29	138 000	143 000	18 800	4 800	5 600	1.55	NUP 311 EC						
	120	29	138 000	143 000	18 800	4 800	5 600	1.45	N 311 EC						

Taper roller bearings  
single row  
d 50-65 mm

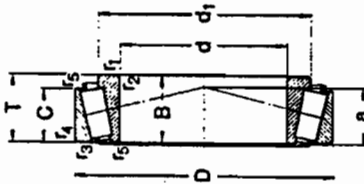



Principal dimensions	Basic load ratings			Fatigue load limit $P_u$	Speed ratings	Mass	Designation	Dimension Series to ISO 355
	d	D	T					
50	110	29,25	125 000	140 000	17 000	4 800	30310	2FB
(cont.)	110	29,25	106 000	120 000	14 300	3 200	31310	7FB
	110	42,25	172 000	212 000	24 500	3 200	32310	2FE
	110	42,25	161 000	216 000	25 000	3 200	32310 B	5FD
55	90	23	78 100	112 000	12 500	4 000	30310	K-JLM 506849/K-JLM 506810
	90	23	60 900	116 000	13 200	4 000	32011 X	3CC
	90	27	89 700	137 000	15 900	4 000	33011	2CE
	95	30	110 000	158 000	18 000	3 800	33111	3CE
	100	22,75	89 700	108 000	12 200	3 800	30211	3DB
	100	26,75	106 000	129 000	15 000	3 800	30311 B	3DC
	100	26,75	101 000	127 000	15 000	3 600	32211	-
	100	35	138 000	190 000	22 000	3 400	32211 B	3DE
	110	39	178 000	232 000	26 500	3 400	32211	2ED
	115	34	125 000	163 000	19 600	3 200	30311	7FC
	120	31,5	142 000	183 000	21 000	3 000	32011	2FB
	120	45,5	191 000	250 000	28 000	2 800	31311	7FB
	120	45,5	198 000	250 000	28 000	3 000	32311	2FD
	120	45,5	180 000	260 000	30 000	2 800	32311 B	5FD
60	95	23	82 500	122 000	13 700	3 800	32012 X	4CC
	95	24	84 200	132 000	15 000	3 600	33012	-
	95	27	91 300	143 000	16 000	3 800	33112	2CE
	100	30	117 000	170 000	19 800	3 600	33212	3CE
	110	23,75	99 000	114 000	13 400	3 400	30212	3EB
	110	23,75	125 000	160 000	19 000	3 400	32212	3EC
	110	38	168 000	236 000	27 000	3 000	33212	3EE
	115	39	188 000	250 000	27 500	3 000	33212	5ED
	115	40	194 000	204 000	30 000	2 600	33012	2EE
	125	37	154 000	204 000	24 500	2 600	33012	7FC
	130	33,5	145 000	196 000	23 000	2 600	33112	2FB
	130	48,5	229 000	305 000	34 000	2 600	33212	2FD
	130	48,5	229 000	305 000	35 500	2 600	33212 B	5FD
65	100	23	84 200	127 000	14 300	3 400	32013 X	4CC
	100	27	96 800	156 000	17 600	3 400	33013	2CE
	110	28	123 000	183 000	21 200	3 200	33113	-
	110	34	142 000	206 000	24 500	3 200	33113	3DE
	120	24,75	114 000	134 000	16 300	3 000	30213	3EB
	120	32,75	151 000	193 000	23 200	3 000	32213	3EC
	120	38	181 000	240 000	27 500	3 000	33213	5ED

Taper roller bearings  
single row  
d 35-50 mm

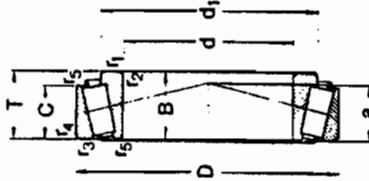

Principal dimensions	Basic load ratings			Fatigue load limit $P_u$	Speed ratings	Mass	Designation	Dimension Series to ISO 355
	d	D	T					
35	80	22,75	72 100	73 500	8 500	5 000	30307	2FB
(cont.)	80	22,75	61 600	67 000	7 800	4 500	31307	7FB
	80	32,75	95 200	106 000	12 200	4 800	32307	2FE
	80	32,75	93 500	114 000	13 200	4 500	32307 B	5FE
40	68	19	52 800	71 000	7 800	5 300	32008 X	3CD
	75	26	79 200	104 000	11 600	5 000	33108	2CE
	80	19,75	61 600	68 000	7 650	4 800	30208	3DB
	80	24,75	74 800	98 500	9 600	4 600	32208	3DC
	80	32	105 000	132 000	15 300	4 300	33208	2DE
	85	33	121 000	150 000	17 300	4 500	33208	2EE
	90	25,25	85 800	95 000	11 000	4 500	30308	2FB
	90	25,25	73 700	81 500	9 650	4 000	31308	7FB
	90	35,25	117 000	140 000	16 300	4 000	32308	2FD
	90	35,25	108 000	140 000	16 300	4 000	32308 B	5FD
45	75	20	58 300	80 000	8 800	4 800	32009 X	3CC
	80	26	64 200	114 000	12 800	4 500	33109	3CE
	85	20,75	66 000	76 500	8 650	4 500	30209	3DB
	85	24,75	80 900	93 000	11 200	4 500	32209	3DC
	85	24,75	73 700	98 000	11 000	4 500	33209 B	5DC
	85	32	108 000	143 000	16 300	4 000	33209	3DE
	85	29	89 700	112 000	12 900	3 600	30209	7FC
	95	36	147 000	186 000	21 200	4 000	32209	2ED
	100	27,25	108 000	120 000	14 600	4 000	30309	2FB
	100	27,25	91 300	102 000	12 500	3 400	31309	7FB
	100	38,25	140 000	170 000	20 400	3 600	32309	2FD
	108	38,25	134 000	176 000	20 000	3 600	32309 B	5FD
50	80	20	60 500	88 000	9 650	4 500	32010 X	3CC
	80	24	69 300	102 000	11 400	4 500	33010	2CE
	82	21,5	72 100	100 000	11 000	4 500	33110	-
	85	26	85 800	122 000	13 700	4 300	33210	3CE
	90	21,75	76 500	91 500	10 400	4 300	30210	3DB
	90	24,75	82 500	100 000	11 600	4 300	32210	3DC
	90	28	106 000	140 000	16 300	4 000	33210	-
	90	28	106 000	140 000	16 300	4 000	33210 B	3DC
	90	32	114 000	160 000	18 300	3 800	33210	-
	100	36	154 000	200 000	22 800	3 800	33210	3DE
	100	36	154 000	200 000	22 800	3 800	33210	5ED

**Needle roller bearings with flanges**  
with inner ring  
d 40-65 mm



Series NK(S), NA 49

Series NA 69

Principal dimensions	Basic load ratings	Fatigue load limit	Speed ratings	Mass	Designation	mm		
						d	D	
D	B	C	C <sub>0</sub>	P <sub>u</sub>	Lubrication	t/min	kg	
								dynamic
40	20	27 500	57 000	7 200	6 300	9 000	0.14	NKI 40/20
55	30	40 200	93 000	12 000	6 300	9 000	0.22	NKI 40/30
62	22	42 900	71 000	9 150	5 600	8 000	0.23	NA 4908
62	40	67 100	125 000	16 000	5 600	8 000	0.43	NA 6908
65	22	42 900	72 000	9 150	5 600	8 000	0.28	NK(S) 40
42	20	29 200	61 000	7 650	6 000	8 500	0.15	NKI 42/20
57	30	41 800	89 000	12 900	6 000	8 500	0.22	NKI 42/30
45	25	38 000	78 000	10 000	5 600	8 000	0.23	NKI 45/25
62	35	49 500	110 000	14 300	5 600	8 000	0.32	NKI 45/35
68	22	45 700	78 000	10 000	5 300	7 500	0.27	NA 4908
68	40	70 400	137 000	17 300	5 300	7 500	0.50	NA 6908
72	22	44 600	78 000	10 000	5 000	7 000	0.34	NK(S) 45
50	25	40 200	88 000	11 200	5 300	7 500	0.27	NKI 50/25
68	35	52 300	122 000	16 000	5 300	7 500	0.38	NKI 50/35
72	22	47 300	85 000	11 000	5 000	7 000	0.27	NKI 50/35
72	40	73 700	150 000	19 000	5 000	7 000	0.52	NA 4910
80	28	62 700	104 000	13 700	4 500	6 300	0.52	NA 6910
55	25	41 800	96 500	12 200	4 800	6 700	0.27	NKI 55/25
72	35	55 000	134 000	17 600	4 800	6 700	0.38	NKI 55/35
80	25	57 200	106 000	13 700	4 500	6 300	0.40	NA 4911
80	45	89 700	190 000	24 000	4 500	6 300	0.78	NA 6911
85	28	66 000	114 000	15 000	4 300	6 000	0.58	NK(S) 55
60	25	44 000	95 000	12 000	4 300	6 000	0.40	NKI 60/25
82	35	60 500	146 000	18 000	4 300	6 000	0.55	NKI 60/35
85	25	60 500	114 000	14 800	4 300	6 000	0.43	NA 4912
85	45	93 500	204 000	26 000	4 300	6 000	0.81	NA 6912
90	28	68 200	120 000	15 800	4 000	5 600	0.58	NK(S) 60
65	25	61 600	120 000	15 300	4 000	5 600	0.46	NA 4913
90	35	73 700	163 000	21 800	4 000	5 600	0.47	NKI 65/25
90	45	95 200	212 000	27 000	4 000	5 600	0.66	NKI 65/35
95	28	70 400	132 000	17 000	3 800	5 300	0.83	NA 6913
							0.84	NK(S) 65

**Engineering Tripos Part IIA: Module 3C4**  
**Machine Design - Transmissions**  
**Numerical solutions - 2006/7**

1 (b) (i) 1.6, (ii) 40%

2. (b)  $F \geq mR\omega^2$

3. (a) #6309, (b) #6409 for A (or a taper roller bearing), NU 1009 EC for B