

ENGINEERING TRIPOS PART IIA

---

Tuesday 27 April 2010 2.30 to 4

---

Module 3C8

MACHINE DESIGN

*Answer not more than **three** questions.*

*All questions carry the same number of marks.*

*The **approximate** percentage of marks allocated to each part of a question is indicated in the right margin.*

*Attachment:*

*Module 3C8 Data Sheet (9 pages).*

STATIONERY REQUIREMENTS

Single-sided script paper

SPECIAL REQUIREMENTS

Engineering Data Book

CUED approved calculator allowed

**You may not start to read the questions  
printed on the subsequent pages of this  
question paper until instructed that you  
may do so by the Invigilator**

1 Figure 1 shows a proposed arrangement of a wind turbine for generating electricity. The turbine is connected to the carrier of a planetary gear. The generator is connected to the annulus. A motor/generator is connected to the sun and is controlled to maintain the speed of the generator at a constant value for compatibility with the national grid frequency. The annulus has  $A$  teeth and the sun has  $S$  teeth, their ratio  $R=A/S$ .

(a) If the torque  $T$  developed by the turbine depends on the wind speed  $V$  and turbine speed  $\omega$  according to:

$$T = aV - b\omega$$

where  $a$  and  $b$  are positive constants show that for a given wind speed maximum power from the turbine is obtained when the turbine speed is  $\omega = (a/2b)V$ . [10%]

(b) If the turbine is to run at speed  $\omega = (a/2b)V$  and the generator is to run at constant speed  $\Omega$  in the presence of variations in wind speed  $V$  find an expression for the motor/generator speed in terms of  $a$ ,  $b$ ,  $\Omega$ ,  $V$  and  $R$ . Hence sketch on one graph the variation of turbine speed, generator speed and motor/generator speed with wind speed  $V$ . [20%]

(c) For the speed conditions in part (b), derive expressions for the turbine torque, generator torque and motor/generator torque, and hence sketch on one graph the variation of these three torques with wind speed  $V$ . [40%]

(d) From the sketches of speed and torque in parts (b) and (c) sketch on one graph the variation in turbine power, generator power and motor/generator power with wind speed  $V$ . Treat power going into the planetary gear as positive. Find the wind speed range over which the motor/generator must put power into the sun. [20%]

(e) State one alternative device for controlling the speed of the sun other than an electric motor/generator, and state any limits that this device might place on the operation of the wind turbine. [10%]

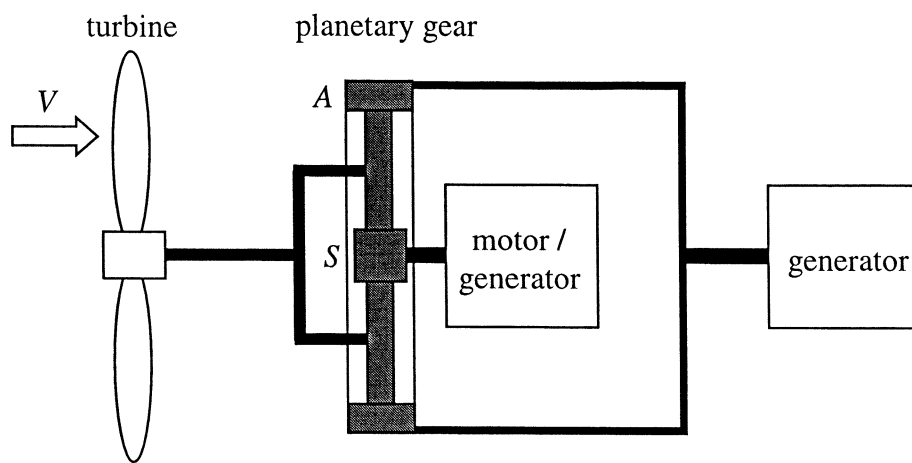


Fig. 1

2 (a) Summarise briefly the idealizations that are made in the Hertz theory of elastic contact. [10%]

(b) Figure 2 shows a schematic of a pivot bearing in a micro-machine. The tip of the shaft has the form of a smooth sphere of radius  $R$  and it rotates at a steady speed  $\omega$  while loaded against a plane surface by a constant axial load  $P$ . Under normal circumstances the pivot is lubricated by a thin film of fluid that provides a resistance to local shear  $\tau$  which is proportional to the shear velocity so that, within the contact patch, at radius  $r$ ,

$$\tau = kr\omega$$

where  $k$  is a constant. If it can be assumed that the contact pressure is Hertzian and the contact patch is radius  $a$ , find expressions for  $a$  and the torque  $T$  required to rotate the shaft in terms of  $\omega$ ,  $P$ ,  $R$ ,  $E^*$  and  $k$ , where  $E^*$  is the contact modulus between the two surfaces. [30%]

(c) After a period of operation, the fluid is lost by evaporation and the tip of the shaft starts to wear. Under these circumstances it can be assumed that the conditions are no longer Hertzian but now the contact pressure  $p(r)$  varies *inversely* with radius  $r$  across the contact patch, so that

$$p(r) = \frac{A}{r}$$

where  $A$  is a constant. If the coefficient of friction between the now unlubricated surfaces is  $\mu$  and the contact patch has worn to a radius of  $2a$ , obtain an expression in terms of  $\mu$ ,  $a$  and  $A$  for the torque  $T'$  now required to maintain rotation. [30%]

(d) Obtain an expression for the factor by which the driving torque has increased, that is, for the ratio  $T'/T$ , in terms of  $\mu$ ,  $E^*$ ,  $k$ ,  $\omega$  and  $R$ . [20%]

(e) Suggest why the form of pressure variation given in (c) is a reasonable assumption once wear has occurred. [10%]

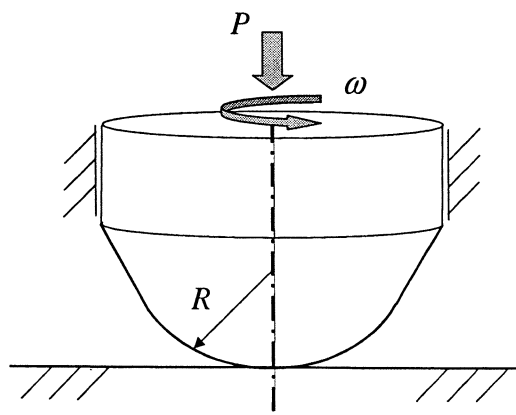


Fig. 2

3 (a) Figure 3(a) shows the cross-section of an angular contact ball bearing. The diagonal lines pass through the points of contact between the balls and the tracks. An axial force  $P_a$  is applied to the inner track via a shaft as indicated. Explain why a radial force  $F_r$  applied to the inner track via the shaft should be considered to act through the intersection of the diagonal lines, distance  $a$  from the face of the bearing. [15%]

(b) Two identical angular contact ball bearings, labelled A and B, each with designation 7208BE, support a shaft as shown in Fig. 3(b). Forces and moments are applied to the shaft as shown.

(i) Find the axial forces  $F_{aA}$  and  $F_{aB}$  induced in each bearing by the combination of the 5kN radial force and the 1.5kNm moment as shown in Fig. 3(b) (neglect the 5kN axial force). Distance  $a$  for the bearing is 34mm. Note that the induced axial force  $F_a$  is determined from the radial force  $F_r$  using  $F_a = F_r/(2Y)$ , where for this bearing  $Y = 0.57$ . [30%]

(ii) Find the minimum preload force required to prevent loss of contact in either bearing under the loading shown in Fig. 3(b) (include the 5kN axial force). Assume that the bearings have equal and linear stiffness. [30%]

(c) If the preload found in (b) (ii) and the loading shown in Fig. 3(b) are applied, find the life of bearing A with 10% probability of failure. The correct viscosity oil is used. Assume that the equivalent radial force on the bearing is equal to the sum of the radial and axial forces. [10%]

(d) State qualitatively how the answers to (b) and (c) are affected if the design is changed so that the bearings are reversed in orientation, that is, mounted back to back instead of face to face. [15%]

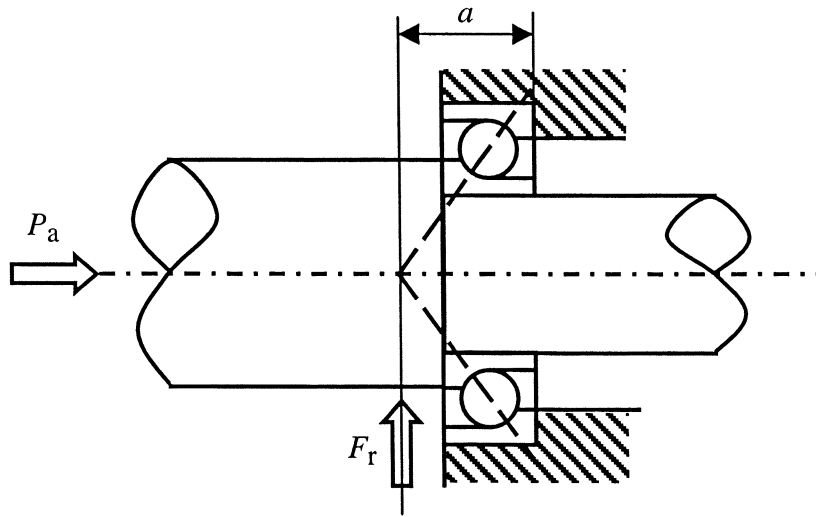


Fig. 3(a)

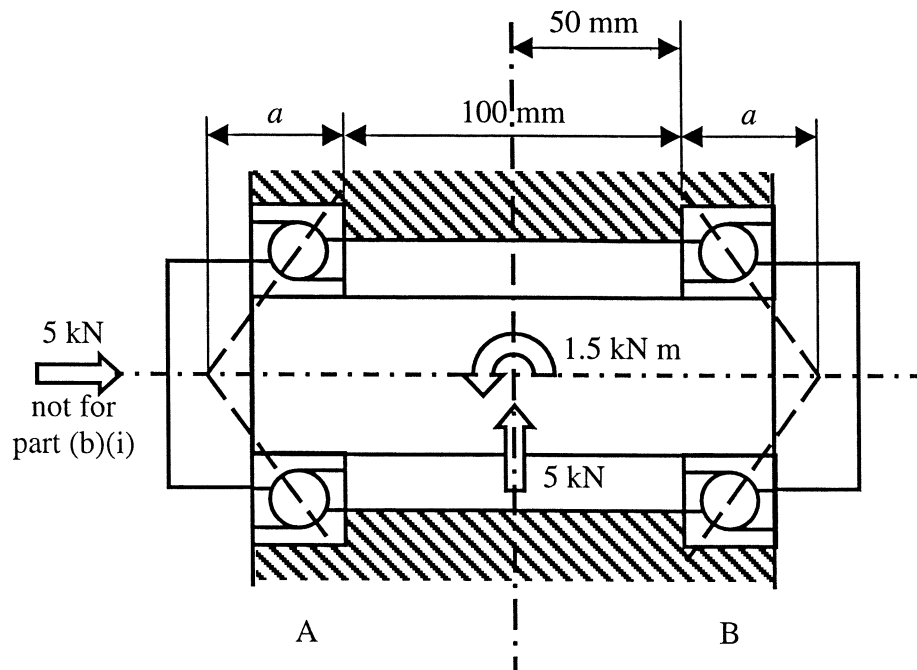


Fig. 3(b)

4 A test pair of involute spur gears has standard teeth with the addendum equal to the module  $m$  and a pressure angle  $\phi$  of  $20^\circ$ . The pinion and wheel have 20 and 80 teeth, respectively, and have the same face width.

(a) Show that the minimum effective radius of curvature for single pair tooth contact is approximately  $2.32m$ . [35%]

(b) The test gears are found to transmit a maximum safe torque of 500 Nm to the wheel. Find the corresponding maximum safe torque on the wheel using spur gears of the same materials with the same standard teeth in the following cases. In each case the safe torque is determined by the maximum contact stress associated with single pair tooth contact.

(i) Using four of the pinions to drive the 80-tooth wheel. [10%]

(ii) Using a single pinion and wheel with tooth numbers 20 and 80, respectively, and a pressure angle  $\phi$  of  $20^\circ$ , but with all gear dimensions doubled as compared with the test gears. [20%]

(iii) Using a single pinion to drive a wheel with 60 teeth, both gears having the same face width. [25%]

(c) What might be the advantages and disadvantages of using the multiple pinion drive described in (b) (i). [10%]

**END OF PAPER**

# ENGINEERING TRIPOS Part IIA

## Module 3C8 Data Sheet

### ELASTIC CONTACT STRESS FORMULAE

Suffixes 1, 2 refer to the two bodies in contact.

$$\text{Effective curvature } \frac{1}{R} = \frac{1}{R_1} + \frac{1}{R_2}$$

$$\text{Contact modulus } \frac{1}{E^*} = \frac{1 - \nu_1^2}{E_1} + \frac{1 - \nu_2^2}{E_2}$$

where  $R_1, R_2$  are the radii of curvature of the two bodies (convex positive).

where  $E_1, E_2$  and  $\nu_1, \nu_2$  are Young's moduli and Poisson's ratios

|                                           | <u>Line contact</u><br>width $2b$ ; load $P'$ per unit length                                                                                                                                                                 | <u>Circular contact</u><br>diameter $2a$ ; load $P$                                            |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| Semi contact width or contact radius      | $b = 2 \left\{ \frac{P'R}{\pi E^*} \right\}^{1/2}$                                                                                                                                                                            | $a = \left\{ \frac{3PR}{4E^*} \right\}^{1/3}$                                                  |
| Maximum contact pressure ('Hertz stress') | $p_0 = \left\{ \frac{P'E^*}{\pi R} \right\}^{1/2}$                                                                                                                                                                            | $p_0 = \frac{1}{\pi} \left\{ \frac{6PE^{*2}}{R^2} \right\}^{1/3}$                              |
| Approach of centres                       | $\delta = \frac{2P'}{\pi} \left[ \frac{1 - \nu_1^2}{E_1} \left\{ \ln \left( \frac{4R_1}{b} \right) - \frac{1}{2} \right\} + \frac{1 - \nu_2^2}{E_2} \left\{ \ln \left( \frac{4R_2}{b} \right) - \frac{1}{2} \right\} \right]$ | $\delta = \frac{a^2}{R} = \frac{1}{2} \left\{ \frac{9}{2} \frac{P^2}{E^{*2} R} \right\}^{1/3}$ |
| Mean contact pressure                     | $\bar{p} = \frac{P'}{2b} = \frac{\pi}{4} p_0$                                                                                                                                                                                 | $\bar{p} = \frac{P}{\pi a^2} = \frac{2}{3} p_0$                                                |
|                                           | $\tau_{\max} = 0.300 p_0$<br>at $x = 0, z = 0.79b$                                                                                                                                                                            | $\tau_{\max} = 0.310 p_0$<br>at $r = 0, z = 0.48a$ for $\nu = 0.3$                             |
| Maximum tensile stress                    | zero                                                                                                                                                                                                                          | $\frac{1}{3}(1 - 2\nu)p_0$ at $r = a, z = 0.79b$                                               |

#### Mildly elliptical contacts


If the gap at zero load is  $h = \frac{1}{2}Ax^2 + \frac{1}{2}By^2$  and  $0.2 < A/B < 5$  then

ratio of semi-axes  $b/a \cong (A/B)^{2/3}$

To calculate the contact **area** or Hertz **stress** use the circular contact equations with  $R = (AB)^{-1/2}$  or better  $R_c = [AB(A+B)/2]^{-1/3}$ .

For **approach** use circular contact equation with  $R = (AB)^{-1/2}$  (not  $R_c$ )

## Hertzian contact frictional losses

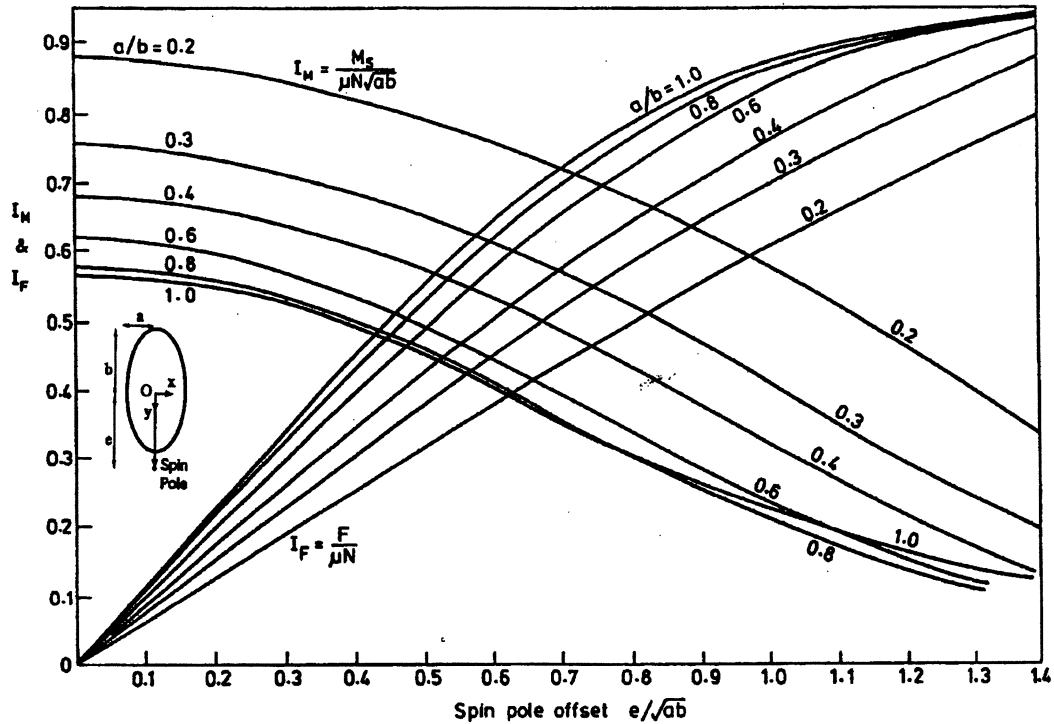


## INVOLUTE GEARING

### Spur gears

|                         |               |                      |
|-------------------------|---------------|----------------------|
| pitch cylinder radii    | $r$           | } with suffix 1 or 2 |
| base cylinder radii     | $r_b$         |                      |
| addendum cylinder radii | $r_a$         |                      |
| number of teeth         | $N$           |                      |
| addendum                | $a = r_a - r$ |                      |
| pressure angle          | $\phi$        |                      |

|                                    |                      |
|------------------------------------|----------------------|
| circumferential pitch              | $p = 2\pi r/N$       |
| base pitch                         | $p_b = p \cos \phi$  |
| module                             | $m = p/\pi = 2r/N$   |
| ratio of contact                   | $r_c$                |
| radius of curvature at pitch point | $\rho = r \sin \phi$ |

### Path of contact

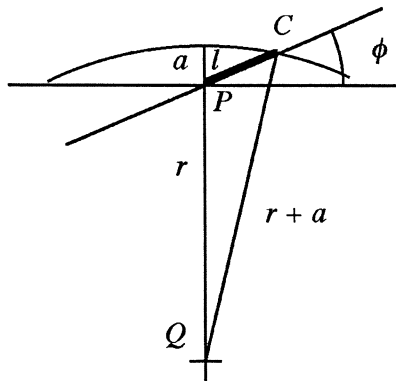

$$l = \left\{ r^2 \sin^2 \phi + a(2r + a) \right\}^{1/2} - r \sin \phi$$

For a standard  $20^\circ$  spur wheel with  $N$  teeth of module  $m$  this becomes

$$\frac{l}{m} = \left( 0.02924N^2 + N + 1 \right)^{1/2} - 0.1710N$$

### Standard tooth forms

Addendum  $a = m$ , Dedendum  $= \frac{7}{6}m$ , pressure angle  $= 20^\circ$ .

Modules:

|                                |                                |
|--------------------------------|--------------------------------|
|                                | 0.3 – 1.0 mm in 0.1 mm steps   |
| 1.0 – 4.0 mm in 0.25 mm steps  | 4.0 – 7.0 mm in 0.5 mm steps   |
| 7.0 – 16.0 mm in 1.0 mm steps  | 16.0 – 24.0 mm in 2.0 mm steps |
| 24.0 – 45.0 mm in 3.0 mm steps | 45.0 – 75.0 mm in 5.0 mm steps |


### Friction in spur gears

$$\frac{\text{average friction loss}}{\text{power transmitted}} \approx \mu\pi \left\{ \frac{1}{N_1} + \frac{1}{N_2} \right\}$$

### Tooth failure

Allowable bending stress  $\sigma_b$  according to AGMA guidelines given by  $\sigma_b = \frac{P'_T}{Jm}$

where  $P'_T$  is force per unit face-width acting tangentially to pitch circle and  $J$  given in the figure below for  $20^\circ$  spur gears. Typical values of  $\sigma_b$  shown in table.

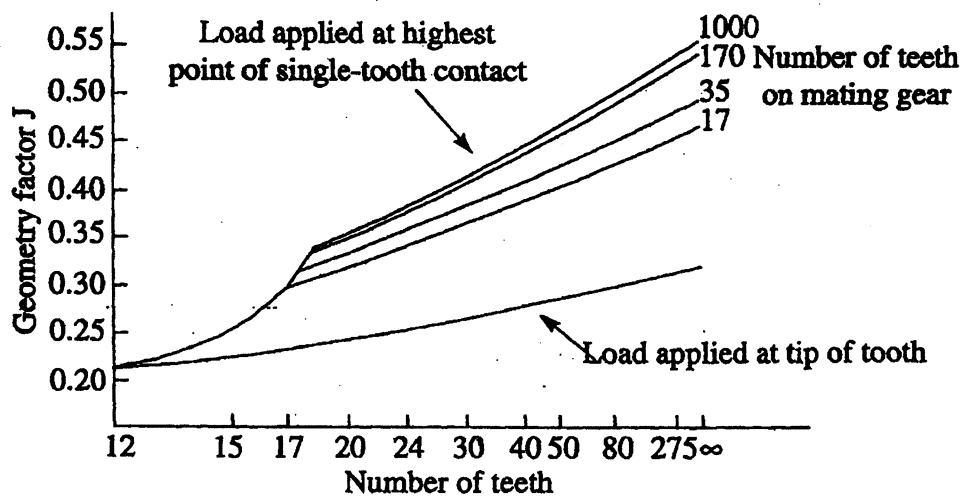

### Typical allowable tooth stresses (AGMA)

| Material       | Condition                       | Bending fatigue strength $\sigma_b$ (MPa) | Surface fatigue strength $\sigma_s$ (MPa) |
|----------------|---------------------------------|-------------------------------------------|-------------------------------------------|
| Steel          | Through hardened and tempered   | 170-390                                   | 590-1200                                  |
|                | Carburised and case hardened    | 380-480                                   | 1250-1550                                 |
| Cast iron      | As cast                         | 69-90                                     | 450-590                                   |
| Nodular iron   | Quenched, annealed and tempered | 150-300                                   | 500-800                                   |
| Malleable iron | Pearlitic                       | 70-145                                    | 500-650                                   |

## EPICYCLIC SPEED RULE

$$\omega_s = (1 + R)\omega_c - R\omega_a \quad \text{where } R = \frac{A}{S}$$

## ROLLING ELEMENT BEARINGS

### Fatigue life



$$L = a_1 a_{23} (C/P)^p \quad p = 3 \text{ for ball and } 10/3 \text{ for roller bearings}$$

|                          |    |      |      |      |      |      |
|--------------------------|----|------|------|------|------|------|
| Fatigue probability %    | 10 | 5    | 4    | 3    | 2    | 1    |
| Life adjust factor $a_1$ | 1  | 0.62 | 0.53 | 0.44 | 0.33 | 0.21 |


### Bearing choice

The information on the following pages concerning loads, viscosities and standard bearing sizes and ratings is extracted from the SKF General Bearing Catalogue and is copied with permission. It is SKF copyright and is not to be further reproduced.


MPFS, DJC, JAW  
November 07

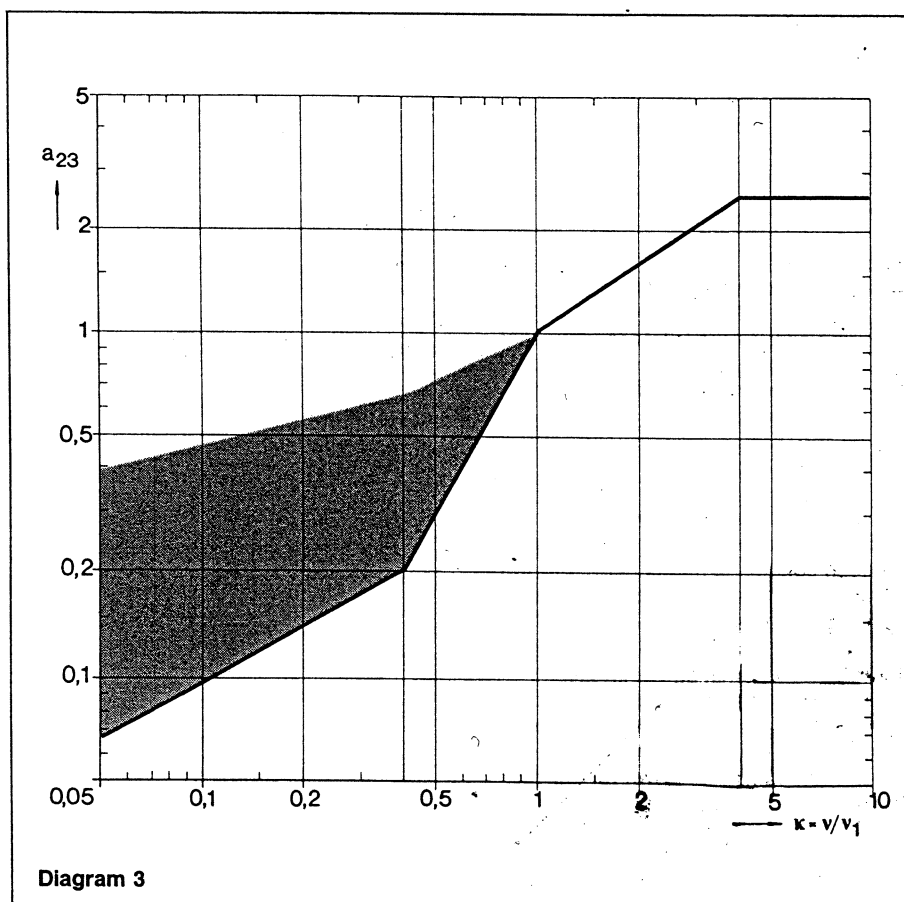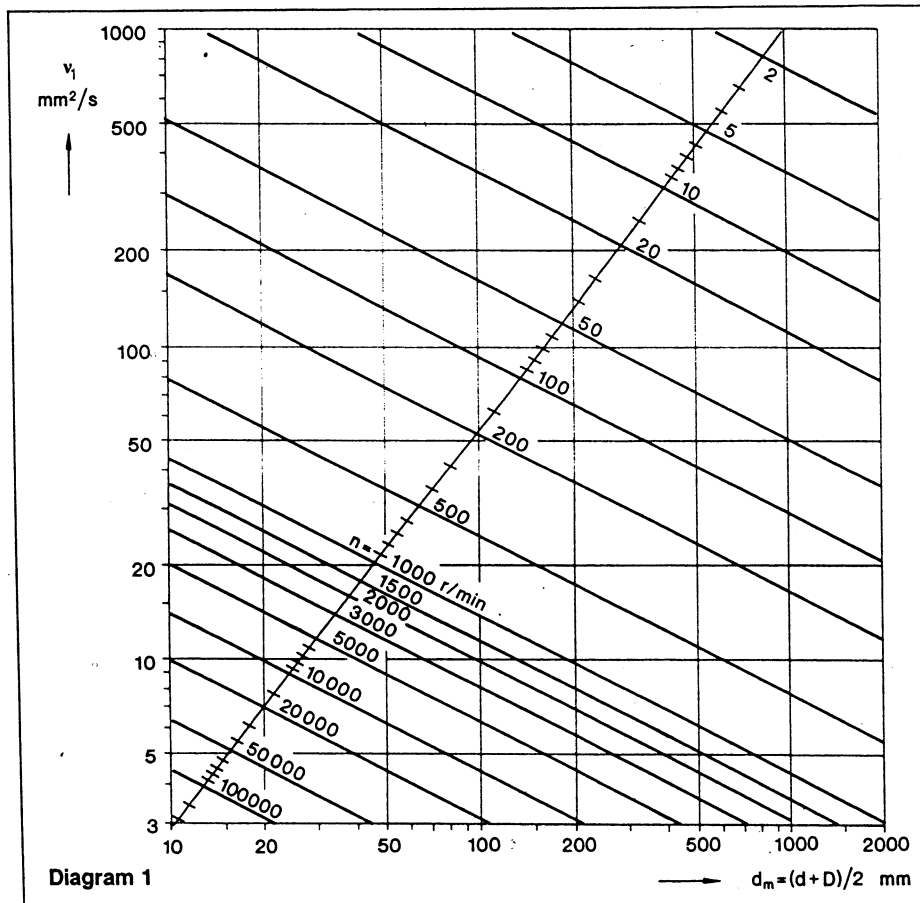

**Deep groove ball bearings**  
single row  
d 35–55 mm




With full outer  
ring shoulders



With recessed outer  
ring shoulders

| Principal dimensions |     | Basic load ratings |        |                | Fatigue load limit<br>$P_u$ | Speed ratings |         | Mass  | Designation |
|----------------------|-----|--------------------|--------|----------------|-----------------------------|---------------|---------|-------|-------------|
|                      |     | D                  | B      | C              |                             | Lubrication   | $r/min$ |       |             |
| d                    | D   | B                  | C      | C <sub>0</sub> | $P_u$                       | grease        | oil     | kg    |             |
| 35                   | 47  | 7                  | 4 750  | 3 200          | 166                         | 13 000        | 16 000  | 0,030 | 61807       |
|                      | 55  | 10                 | 9 560  | 6 200          | 290                         | 11 000        | 14 000  | 0,080 | 61907       |
|                      | 62  | 9                  | 12 400 | 8 150          | 375                         | 10 000        | 13 000  | 0,116 | 6007        |
|                      | 62  | 14                 | 15 900 | 10 200         | 440                         | 9 000         | 11 000  | 0,16  | 6207        |
|                      | 72  | 17                 | 25 500 | 15 300         | 655                         | 8 000         | 10 000  | 0,29  | 6307        |
|                      | 80  | 21                 | 33 200 | 19 000         | 815                         | 7 500         | 9 500   | 0,46  | 6307        |
|                      | 100 | 25                 | 55 300 | 31 000         | 1 290                       | 7 000         | 8 500   | 0,85  | 6407        |
| 40                   | 52  | 7                  | 4 940  | 3 450          | 186                         | 11 000        | 14 000  | 0,034 | 61808       |
|                      | 62  | 12                 | 13 800 | 9 300          | 425                         | 10 000        | 13 000  | 0,12  | 61908       |
|                      | 68  | 9                  | 13 300 | 9 150          | 440                         | 9 500         | 12 000  | 0,13  | 6008        |
|                      | 68  | 15                 | 16 800 | 11 600         | 490                         | 8 500         | 10 000  | 0,19  | 6208        |
|                      | 80  | 18                 | 30 700 | 19 000         | 800                         | 7 500         | 9 000   | 0,37  | 6308        |
|                      | 90  | 23                 | 41 000 | 24 000         | 1 020                       | 7 000         | 8 500   | 0,63  | 6408        |
|                      | 110 | 27                 | 63 700 | 36 500         | 1 530                       | 6 700         | 8 000   | 1,25  | 6408        |
| 45                   | 58  | 7                  | 6 050  | 4 300          | 228                         | 9 500         | 12 000  | 0,040 | 61809       |
|                      | 68  | 12                 | 14 000 | 9 800          | 465                         | 9 000         | 11 000  | 0,14  | 61909       |
|                      | 75  | 10                 | 15 600 | 10 800         | 520                         | 9 000         | 11 000  | 0,17  | 6009        |
|                      | 75  | 16                 | 20 800 | 14 600         | 640                         | 8 000         | 10 000  | 0,25  | 6209        |
|                      | 85  | 18                 | 33 500 | 21 500         | 915                         | 7 500         | 9 000   | 0,41  | 6309        |
|                      | 100 | 25                 | 52 700 | 31 500         | 1 340                       | 6 700         | 8 000   | 0,83  | 6409        |
|                      | 120 | 29                 | 76 100 | 45 000         | 1 900                       | 6 000         | 7 000   | 1,55  | 6409        |
| 50                   | 65  | 7                  | 6 240  | 4 750          | 250                         | 9 000         | 11 000  | 0,052 | 61810       |
|                      | 72  | 12                 | 14 800 | 10 400         | 500                         | 8 500         | 10 000  | 0,14  | 61910       |
|                      | 80  | 10                 | 16 300 | 11 400         | 560                         | 8 500         | 10 000  | 0,18  | 6010        |
|                      | 80  | 16                 | 21 600 | 14 000         | 710                         | 8 500         | 10 000  | 0,26  | 6210        |
|                      | 90  | 20                 | 35 100 | 23 200         | 980                         | 7 000         | 8 500   | 0,46  | 6310        |
|                      | 100 | 27                 | 51 600 | 30 000         | 1 400                       | 6 300         | 7 500   | 1,05  | 6410        |
|                      | 130 | 31                 | 87 100 | 52 000         | 2 200                       | 5 300         | 6 300   | 1,90  | 6410        |
| 55                   | 72  | 9                  | 8 840  | 6 800          | 360                         | 8 500         | 10 000  | 0,083 | 61811       |
|                      | 80  | 13                 | 15 500 | 11 000         | 695                         | 8 000         | 9 500   | 0,19  | 61911       |
|                      | 80  | 18                 | 20 800 | 14 000         | 860                         | 7 500         | 9 000   | 0,26  | 6011        |
|                      | 90  | 21                 | 28 100 | 18 000         | 1 100                       | 7 000         | 8 500   | 0,39  | 6211        |
|                      | 100 | 26                 | 43 500 | 26 000         | 1 500                       | 6 300         | 7 500   | 0,81  | 6311        |
|                      | 120 | 29                 | 71 500 | 43 000         | 2 100                       | 5 600         | 6 700   | 1,35  | 6411        |
|                      | 140 | 33                 | 99 500 | 62 000         | 2 600                       | 5 000         | 6 000   | 2,30  | 6411        |

**Angular contact ball bearings**  
single row  
d 10–65 mm



| Principal dimensions |     | Basic load ratings |         |                | Fatigue load limit<br>$P_u$ | Speed ratings |         | Mass  | Designation |
|----------------------|-----|--------------------|---------|----------------|-----------------------------|---------------|---------|-------|-------------|
|                      |     | D                  | B       | C              |                             | Lubrication   | $r/min$ |       |             |
| d                    | D   | B                  | C       | C <sub>0</sub> | $P_u$                       | grease        | oil     | kg    |             |
| 10                   | 30  | 9                  | 7 020   | 3 350          | 140                         | 19 000        | 28 000  | 0,030 | 7200 BE     |
| 12                   | 32  | 10                 | 7 610   | 3 800          | 160                         | 18 000        | 26 000  | 0,036 | 7201 BE     |
|                      | 37  | 12                 | 10 600  | 5 000          | 208                         | 17 000        | 24 000  | 0,060 | 7301 BE     |
| 15                   | 35  | 11                 | 8 840   | 4 800          | 204                         | 17 000        | 24 000  | 0,045 | 7202 BE     |
|                      | 42  | 13                 | 13 000  | 6 700          | 280                         | 15 000        | 20 000  | 0,080 | 7302 BE     |
| 17                   | 40  | 12                 | 11 100  | 6 100          | 260                         | 15 000        | 20 000  | 0,065 | 7203 BE     |
|                      | 47  | 14                 | 15 900  | 8 300          | 355                         | 13 000        | 18 000  | 0,11  | 7303 BE     |
| 20                   | 47  | 14                 | 14 000  | 8 300          | 355                         | 12 000        | 17 000  | 0,11  | 7204 BE     |
|                      | 52  | 15                 | 19 000  | 10 400         | 440                         | 11 000        | 16 000  | 0,14  | 7304 BE     |
| 25                   | 52  | 15                 | 15 600  | 10 200         | 430                         | 10 000        | 15 000  | 0,13  | 7205 BE     |
|                      | 62  | 17                 | 26 000  | 15 600         | 655                         | 9 000         | 13 000  | 0,23  | 7305 BE     |
| 30                   | 62  | 16                 | 23 800  | 15 600         | 655                         | 8 500         | 12 000  | 0,20  | 7206 BE     |
|                      | 72  | 19                 | 34 500  | 21 200         | 900                         | 8 000         | 11 000  | 0,34  | 7306 BE     |
| 35                   | 72  | 17                 | 30 700  | 20 800         | 880                         | 8 000         | 11 000  | 0,28  | 7207 BE     |
|                      | 80  | 21                 | 39 000  | 24 500         | 1 040                       | 7 500         | 10 000  | 0,45  | 7307 BE     |
| 40                   | 80  | 18                 | 36 400  | 26 000         | 1 100                       | 7 000         | 9 500   | 0,37  | 7208 BE     |
|                      | 90  | 23                 | 49 400  | 33 500         | 1 400                       | 6 700         | 9 000   | 0,63  | 7308 BE     |
| 45                   | 85  | 19                 | 37 700  | 28 000         | 1 200                       | 6 700         | 9 000   | 0,42  | 7209 BE     |
|                      | 100 | 25                 | 60 500  | 41 500         | 1 730                       | 6 000         | 8 000   | 0,85  | 7309 BE     |
| 50                   | 90  | 20                 | 39 000  | 30 500         | 1 290                       | 6 000         | 8 000   | 0,47  | 7210 BE     |
|                      | 110 | 27                 | 74 100  | 51 000         | 2 200                       | 5 300         | 7 000   | 1,10  | 7310 BE     |
| 55                   | 100 | 21                 | 48 800  | 38 000         | 1 620                       | 5 600         | 7 500   | 0,82  | 7211 BE     |
|                      | 120 | 29                 | 85 200  | 60 000         | 2 550                       | 4 800         | 6 300   | 1,40  | 7311 BE     |
| 60                   | 110 | 22                 | 57 200  | 45 500         | 1 920                       | 5 000         | 6 700   | 0,90  | 7212 BE     |
|                      | 130 | 31                 | 95 600  | 69 500         | 3 000                       | 4 500         | 6 000   | 1,75  | 7312 BE     |
| 65                   | 120 | 23                 | 66 300  | 54 000         | 2 280                       | 4 500         | 6 000   | 1,00  | 7213 BE     |
|                      | 140 | 33                 | 108 000 | 80 000         | 3 350                       | 4 300         | 5 600   | 2,15  | 7313 BE     |


| Type NU              |     |     | Type NU            |                |                | Type NUP           |        |             | Type N        |        |     |      |             |            |             |  |  |
|----------------------|-----|-----|--------------------|----------------|----------------|--------------------|--------|-------------|---------------|--------|-----|------|-------------|------------|-------------|--|--|
| Principal dimensions |     |     | Basic load ratings |                |                | Fatigue load limit |        |             | Speed ratings |        |     | Mass |             |            | Designation |  |  |
| d                    | D   | B   | C                  | C <sub>0</sub> | P <sub>u</sub> | N                  | r/min  | Lubrication | oil           | grease | oil | kg   | -           |            |             |  |  |
| mm                   | mm  | mm  | mm                 | mm             | N              | r/min              |        |             |               |        |     |      |             |            |             |  |  |
| 55                   | 80  | 16  | 30                 | 800            | 34 500         | 4 000              | 8 500  | 10 000      |               |        |     | 0,31 | NU 1010     |            |             |  |  |
|                      | 90  | 20  | 64                 | 400            | 69 500         | 8 800              | 6 300  | 7 500       |               |        |     | 0,48 | NU 210 EC   |            |             |  |  |
|                      | 90  | 20  | 64                 | 400            | 69 500         | 8 800              | 6 300  | 7 500       |               |        |     | 0,49 | NJ 210 EC   |            |             |  |  |
|                      | 90  | 20  | 64                 | 400            | 69 500         | 8 800              | 6 300  | 7 500       |               |        |     | 0,51 | NUP 210 EC  |            |             |  |  |
|                      | 90  | 20  | 64                 | 400            | 69 500         | 8 800              | 6 300  | 7 500       |               |        |     | 0,48 | N 210 EC    |            |             |  |  |
|                      | 90  | 23  | 78                 | 100            | 88 000         | 11 400             | 6 300  | 7 500       |               |        |     | 0,56 | NU 2210 EC  |            |             |  |  |
|                      | 90  | 23  | 78                 | 100            | 88 000         | 11 400             | 6 300  | 7 500       |               |        |     | 0,58 | NJ 2210 EC  |            |             |  |  |
|                      | 90  | 23  | 78                 | 100            | 88 000         | 11 400             | 6 300  | 7 500       |               |        |     | 0,59 | NUP 2210 EC |            |             |  |  |
|                      | 110 | 27  | 110                | 000            | 112 000        | 15 000             | 5 000  | 6 000       |               |        |     | 1,15 | NU 310 EC   |            |             |  |  |
|                      | 110 | 27  | 110                | 000            | 112 000        | 15 000             | 5 000  | 6 000       |               |        |     | 1,15 | NJ 310 EC   |            |             |  |  |
|                      | 110 | 27  | 110                | 000            | 112 000        | 15 000             | 5 000  | 6 000       |               |        |     | 1,15 | NUP 310 EC  |            |             |  |  |
|                      | 110 | 27  | 110                | 000            | 112 000        | 15 000             | 5 000  | 6 000       |               |        |     | 1,15 | N 310 EC    |            |             |  |  |
| 55                   | 110 | 40  | 161                | 000            | 186 000        | 24 500             | 5 000  | 6 000       |               |        |     | 1,70 | NU 2310 EC  |            |             |  |  |
|                      | 110 | 40  | 161                | 000            | 186 000        | 24 500             | 5 000  | 6 000       |               |        |     | 1,75 | NJ 2310 EC  |            |             |  |  |
|                      | 110 | 40  | 161                | 000            | 186 000        | 24 500             | 5 000  | 6 000       |               |        |     | 1,80 | NUP 2310 EC |            |             |  |  |
|                      | 130 | 31  | 130                | 000            | 127 000        | 16 600             | 5 000  | 6 000       |               |        |     | 2,00 | NU 410      |            |             |  |  |
|                      | 130 | 31  | 130                | 000            | 127 000        | 16 600             | 5 000  | 6 000       |               |        |     | 2,05 | NJ 410      |            |             |  |  |
|                      | 130 | 31  | 130                | 000            | 127 000        | 16 600             | 5 000  | 6 000       |               |        |     | 2,05 | NUP 410     |            |             |  |  |
|                      | 155 | 90  | 18                 | 57             | 200            | 69 500             | 8 300  | 7 000       | 8 500         |        |     | 0,40 | NU 1011 EC  |            |             |  |  |
|                      | 100 | 21  | 84                 | 200            | 95 000         | 12 200             | 6 000  | 7 000       |               |        |     | 0,66 | NU 211 EC   |            |             |  |  |
|                      | 100 | 21  | 84                 | 200            | 95 000         | 12 200             | 6 000  | 7 000       |               |        |     | 0,67 | NJ 211 EC   |            |             |  |  |
|                      | 100 | 21  | 84                 | 200            | 95 000         | 12 200             | 6 000  | 7 000       |               |        |     | 0,69 | NUP 211 EC  |            |             |  |  |
|                      | 100 | 21  | 84                 | 200            | 95 000         | 12 200             | 6 000  | 7 000       |               |        |     | 0,66 | N 211 EC    |            |             |  |  |
|                      | 55  | 100 | 25                 | 99             | 000            | 118 000            | 15 300 | 6 000       | 7 000         |        |     |      | 0,79        | NU 2211 EC |             |  |  |
| 100                  |     | 25  | 99                 | 000            | 118 000        | 15 300             | 6 000  | 7 000       |               |        |     | 0,81 | NJ 2211 EC  |            |             |  |  |
| 100                  |     | 25  | 99                 | 000            | 118 000        | 15 300             | 6 000  | 7 000       |               |        |     | 0,82 | NUP 2211 EC |            |             |  |  |
| 100                  |     | 25  | 99                 | 000            | 118 000        | 15 300             | 6 000  | 7 000       |               |        |     | 0,79 | N 2211 EC   |            |             |  |  |
| 120                  |     | 29  | 138                | 000            | 143 000        | 18 600             | 4 800  | 5 600       |               |        |     | 1,45 | NU 311 EC   |            |             |  |  |
| 120                  |     | 29  | 138                | 000            | 143 000        | 18 600             | 4 800  | 5 600       |               |        |     | 1,50 | NJ 311 EC   |            |             |  |  |
| 120                  |     | 29  | 138                | 000            | 143 000        | 18 600             | 4 800  | 5 600       |               |        |     | 1,55 | NUP 311 EC  |            |             |  |  |
| 120                  |     | 29  | 138                | 000            | 143 000        | 18 600             | 4 800  | 5 600       |               |        |     | 1,45 | N 311 EC    |            |             |  |  |
| 120                  |     | 29  | 138                | 000            | 143 000        | 18 600             | 4 800  | 5 600       |               |        |     | 1,45 | N 311 EC    |            |             |  |  |
| 120                  |     | 29  | 138                | 000            | 143 000        | 18 600             | 4 800  | 5 600       |               |        |     | 1,45 | N 311 EC    |            |             |  |  |
| 120                  |     | 29  | 138                | 000            | 143 000        | 18 600             | 4 800  | 5 600       |               |        |     | 1,45 | N 311 EC    |            |             |  |  |

8

Technical drawing of a shaft-hub assembly. The shaft has a diameter  $d$  and a tolerance zone of  $\pm \frac{t}{2}$ . The hub has an inner diameter  $D$  and a tolerance zone of  $\pm \frac{T}{2}$ . The drawing shows the fit with dimensions  $d_1$ ,  $d$ ,  $D$ ,  $t$ ,  $T$ ,  $C$ ,  $l_1$ ,  $l_2$ ,  $l_3$ ,  $r_1$ ,  $r_2$ ,  $r_3$ , and  $B$ .

| Principal dimensions | Basic load ratings |       |         |         |                | Fatigue load limit<br>P <sub>u</sub> | Speed ratings<br>Lubrication<br>grease oil | Mass<br>kg | Designation               | Dimension<br>Series to<br>ISO 355 |
|----------------------|--------------------|-------|---------|---------|----------------|--------------------------------------|--------------------------------------------|------------|---------------------------|-----------------------------------|
|                      | d                  | D     | T       | C       | C <sub>0</sub> |                                      |                                            |            |                           |                                   |
| mm                   |                    |       |         |         |                |                                      |                                            |            |                           |                                   |
| 50                   | 110                | 29,25 | 125 000 | 140 000 | 17 000         | 3 600                                | 4 800                                      | 1,25       | 30310                     | 2FB                               |
|                      | 110                | 29,25 | 108 000 | 120 000 | 14 300         | 3 200                                | 4 300                                      | 1,20       | 31310                     | 7FB                               |
|                      | (Cont.)            | 110   | 42,25   | 172 000 | 212 000        | 24 500                               | 3 200                                      | 4 300      | 1,80                      | 2FD                               |
|                      | 110                | 42,25 | 172 000 | 212 000 | 24 500         | 3 200                                | 4 300                                      | 1,85       | 32310 B                   | 5FD                               |
|                      | 110                | 42,25 | 161 000 | 216 000 | 25 500         | 3 200                                | 4 300                                      | 1,85       | 32310 B                   | 5FD                               |
| 55                   | 90                 | 23    | 78 100  | 112 000 | 12 500         | 4 000                                | 5 300                                      | 0,56       | K-JLM 506849/K-JLM 506810 | -                                 |
|                      | 90                 | 23    | 80 900  | 116 000 | 13 200         | 4 000                                | 5 300                                      | 0,55       | 32011 X                   | 30C                               |
|                      | 90                 | 27    | 89 700  | 137 000 | 15 300         | 4 000                                | 5 300                                      | 0,67       | 33011                     | 20E                               |
|                      | 95                 | 30    | 110 000 | 156 000 | 18 000         | 3 800                                | 5 000                                      | 0,86       | 33111                     | 30E                               |
|                      | 100                | 33,75 | 89 700  | 106 000 | 12 200         | 3 800                                | 5 000                                      | 0,70       | 30211                     | 30B                               |
|                      | 100                | 33,75 | 106 000 | 129 000 | 15 000         | 3 800                                | 5 000                                      | 0,83       | 32211                     | 30C                               |
|                      | 100                | 26,75 | 101 000 | 127 000 | 15 300         | 3 600                                | 4 800                                      | 0,87       | 32211 B                   | -                                 |
|                      | 100                | 35    | 138 000 | 190 000 | 22 500         | 3 400                                | 4 500                                      | 1,20       | 33211                     | 30E                               |
|                      | 110                | 39    | 179 000 | 232 000 | 28 500         | 3 400                                | 4 500                                      | 1,70       | T2ED 055                  | 30E                               |
|                      | 115                | 44    | 125 000 | 163 000 | 19 600         | 3 000                                | 4 000                                      | 1,60       | T7FC 055                  | 30E                               |
|                      | 120                | 47,5  | 137 000 | 177 000 | 21 000         | 2 800                                | 3 800                                      | 1,55       | 31311                     | 2FB                               |
|                      | 120                | 47,5  | 137 000 | 177 000 | 21 000         | 2 800                                | 3 800                                      | 1,60       | 31311 B                   | 2FB                               |
|                      | 120                | 45,5  | 168 000 | 250 000 | 30 000         | 5 000                                | 6 000                                      | 2,30       | 32311                     | 5FD                               |
|                      | 120                | 45,5  | 180 000 | 260 000 | 30 000         | 2 800                                | 3 800                                      | 2,50       | 32311 B                   | 5FD                               |
|                      | 60                 | 95    | 23      | 82 500  | 122 000        | 13 700                               | 3 800                                      | 5 000      | 0,59                      | 32012 X                           |
| 95                   |                    | 24    | 84 200  | 132 000 | 15 000         | 3 600                                | 4 800                                      | 0,62       | K-JLM 508748/K-JLM 508710 | -                                 |
| 95                   |                    | 27    | 91 300  | 143 000 | 16 000         | 3 800                                | 5 000                                      | 0,71       | 33012                     | 20E                               |
| 100                  |                    | 30    | 117 000 | 170 000 | 19 600         | 3 600                                | 4 800                                      | 0,92       | 33012                     | 30E                               |
| 110                  |                    | 33,75 | 99 000  | 114 000 | 13 400         | 3 400                                | 4 500                                      | 0,88       | 30212                     | 30B                               |
| 110                  |                    | 33,75 | 125 000 | 160 000 | 17 000         | 3 400                                | 4 500                                      | 1,15       | 32212                     | 30E                               |
| 110                  |                    | 38    | 168 000 | 236 000 | 29 000         | 3 000                                | 4 000                                      | 1,60       | 33212                     | 30E                               |
| 115                  |                    | 39    | 168 000 | 250 000 | 27 500         | 3 000                                | 4 000                                      | 1,85       | T5ED 060                  | 5ED                               |
| 115                  |                    | 40    | 194 000 | 260 000 | 30 000         | 3 200                                | 4 300                                      | 1,85       | T2EE 060                  | 5ED                               |
| 125                  |                    | 37    | 154 000 | 204 000 | 24 500         | 2 600                                | 3 600                                      | 2,05       | T7FC 060                  | 7FC                               |
| 130                  |                    | 33,5  | 168 000 | 196 000 | 23 600         | 3 000                                | 4 000                                      | 1,95       | 30312                     | 2FB                               |
| 130                  |                    | 33,5  | 145 000 | 166 000 | 20 400         | 2 600                                | 3 600                                      | 1,90       | 31312                     | 2FB                               |
| 130                  |                    | 38,5  | 229 000 | 290 000 | 34 000         | 2 600                                | 3 600                                      | 2,85       | 32312                     | 5FD                               |
| 130                  |                    | 38,5  | 220 000 | 305 000 | 35 500         | 2 600                                | 3 600                                      | 2,80       | 32312 B                   | 5FD                               |
| 65                   |                    | 100   | 23      | 84 200  | 127 000        | 14 300                               | 3 400                                      | 4 500      | 0,63                      | 32013 X                           |
|                      | 100                | 27    | 96 600  | 156 000 | 17 600         | 3 200                                | 4 300                                      | 0,78       | 33013                     | 20E                               |
|                      | 110                | 26    | 123 000 | 183 000 | 21 200         | 3 400                                | 4 500                                      | 1,05       | K-JLM 511946/K-JLM 511910 | -                                 |
|                      | 110                | 34    | 142 000 | 208 000 | 24 500         | 3 200                                | 4 300                                      | 1,30       | 33113                     | 3DE                               |
|                      | 120                | 24,75 | 114 000 | 134 000 | 16 300         | 3 000                                | 4 000                                      | 1,15       | 30213                     | 30B                               |
|                      | 120                | 32,75 | 151 000 | 193 000 | 23 200         | 3 000                                | 4 000                                      | 1,50       | 32213                     | 30E                               |
|                      | 120                | 39    | 161 000 | 240 000 | 27 500         | 3 000                                | 4 000                                      | 1,95       | T5ED 065                  | 5ED                               |
|                      | 120                | 39    | 161 000 | 240 000 | 27 500         | 3 000                                | 4 000                                      | 1,95       | T5ED 065                  | 5ED                               |

Needle roller bearings with flanges  
with inner ring  
d 40–65 mm

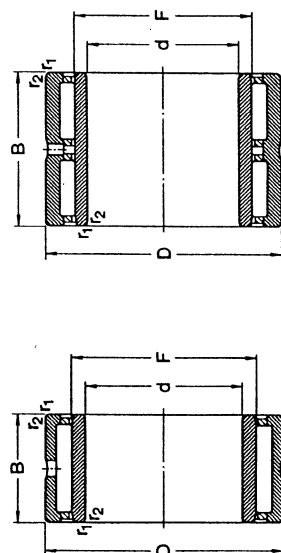

Series NA 69

Series NKI(S), NA 49

| Principal dimensions |    | Basic load ratings |        | Fatigue load limit $P_u$ | Speed ratings  |             | Mass  | Designation |
|----------------------|----|--------------------|--------|--------------------------|----------------|-------------|-------|-------------|
|                      |    | d                  | D      | C                        | C <sub>0</sub> | Lubrication |       |             |
| mm                   |    | N                  |        | N                        | r/min          | grease      | oil   |             |
| 40                   | 55 | 20                 | 27 500 | 57 000                   | 7 200          | 6 300       | 9 000 | NKI 40/20   |
|                      | 55 | 30                 | 40 200 | 93 000                   | 12 000         | 6 300       | 9 000 | NKI 40/30   |
|                      | 62 | 22                 | 42 900 | 71 000                   | 9 150          | 5 600       | 8 000 | NA 4908     |
|                      | 62 | 40                 | 67 100 | 125 000                  | 16 000         | 5 600       | 8 000 | NA 4908     |
|                      | 65 | 22                 | 42 900 | 72 000                   | 9 150          | 5 600       | 8 000 | NKIS 40     |
| 42                   | 57 | 20                 | 29 200 | 61 000                   | 7 650          | 6 000       | 8 500 | NKI 42/20   |
|                      | 57 | 30                 | 41 800 | 98 000                   | 12 900         | 6 000       | 8 500 | NKI 42/30   |
| 45                   | 62 | 25                 | 38 000 | 78 000                   | 10 000         | 5 600       | 8 000 | NKI 45/25   |
|                      | 62 | 35                 | 49 500 | 110 000                  | 14 300         | 5 600       | 8 000 | NKI 45/35   |
|                      | 68 | 22                 | 45 700 | 78 000                   | 10 000         | 5 300       | 7 500 | NA 4909     |
|                      | 68 | 40                 | 70 400 | 137 000                  | 17 300         | 5 300       | 7 500 | NA 4909     |
|                      | 72 | 22                 | 44 600 | 78 000                   | 10 000         | 5 000       | 7 000 | NKIS 45     |
| 50                   | 68 | 25                 | 40 200 | 88 000                   | 11 200         | 5 300       | 7 500 | NKI 50/25   |
|                      | 68 | 35                 | 52 300 | 122 000                  | 16 000         | 5 300       | 7 500 | NKI 50/35   |
|                      | 72 | 22                 | 47 300 | 85 000                   | 11 000         | 5 000       | 7 000 | NA 4910     |
|                      | 72 | 40                 | 73 700 | 150 000                  | 19 000         | 5 000       | 7 000 | NA 4910     |
|                      | 80 | 28                 | 62 700 | 104 000                  | 13 700         | 4 500       | 6 300 | NKIS 50     |
| 55                   | 72 | 25                 | 41 800 | 96 000                   | 12 200         | 4 800       | 6 700 | NKI 55/25   |
|                      | 72 | 35                 | 55 000 | 134 000                  | 17 600         | 4 800       | 6 700 | NKI 55/35   |
|                      | 80 | 25                 | 57 200 | 106 000                  | 13 700         | 4 500       | 6 300 | NA 4911     |
|                      | 80 | 45                 | 89 700 | 190 000                  | 24 000         | 4 500       | 6 300 | NA 4911     |
|                      | 85 | 28                 | 66 000 | 114 000                  | 15 000         | 4 300       | 6 000 | NKIS 55     |
| 60                   | 82 | 25                 | 44 000 | 95 000                   | 12 000         | 4 300       | 6 000 | NKI 60/25   |
|                      | 82 | 35                 | 60 500 | 146 000                  | 19 000         | 4 300       | 6 000 | NKI 60/35   |
|                      | 85 | 25                 | 60 500 | 114 000                  | 14 600         | 4 300       | 6 000 | NA 4912     |
|                      | 85 | 45                 | 93 500 | 204 000                  | 26 000         | 4 300       | 6 000 | NA 4912     |
|                      | 90 | 28                 | 68 200 | 120 000                  | 15 600         | 4 000       | 5 600 | NKIS 60     |
| 65                   | 90 | 25                 | 61 600 | 120 000                  | 15 300         | 4 000       | 5 600 | NA 4913     |
|                      | 90 | 25                 | 52 800 | 106 000                  | 13 700         | 4 000       | 5 600 | NKI 65/25   |
|                      | 90 | 35                 | 73 700 | 163 000                  | 21 600         | 4 000       | 5 600 | NKI 65/35   |
|                      | 90 | 45                 | 95 200 | 212 000                  | 27 000         | 4 000       | 5 600 | NA 4913     |
|                      | 95 | 28                 | 70 400 | 132 000                  | 17 000         | 3 800       | 5 300 | NKIS 65     |

Answers 3C8 2010

1 (b)  $(1+R)\left(\frac{a}{2b}\right)V - R\Omega$

(c)  $T_{turbine} = \frac{aV}{2}, \quad T_{motor/gen} = -\frac{1}{(1+R)}\frac{aV}{2}, \quad T_{gen} = -\frac{R}{(1+R)}\frac{aV}{2}$

(d)  $0 < V < \frac{R}{(1+R)}\frac{2b}{a}\Omega$

2 (b)  $a = \left(\frac{3PR}{4E^*}\right)^{\frac{1}{3}}, \quad T = \frac{k\pi w}{2}\left(\frac{3PR}{4E^*}\right)^{\frac{4}{3}}$

(c)  $T' = 4\pi a^2 \mu A$

(d)  $\frac{T'}{T} = \frac{8}{3} \frac{\mu E^*}{kw\pi R}$

3 (b) (i)  $F_{aA} = 5.6 \text{ kN}, \quad F_{aB} = 10.0 \text{ kN}$

(ii)  $12.5 \text{ kN}$

(c)  $4.9 \text{ million revolutions}$

4 (b) (i)  $2 \text{ kNm}$

(ii)  $4 \text{ kNm}$

(iii)  $357 \text{ Nm}$