

ENGINEERING TRIPOS PART IIA

Tuesday 30 April 2013 2 to 3.30

Module 3C5

DYNAMICS

*Answer not more than **three** questions.*

All questions carry the same number of marks.

*The **approximate** percentage of marks allocated to each part of a question is indicated in the right margin.*

Attachment:

Data sheet: 3C5 Dynamics and 3C6 Vibration (6 pages)

STATIONERY REQUIREMENTS

Single-sided script paper

SPECIAL REQUIREMENTS

Engineering Data Book

CUED approved calculator allowed

You may not start to read the questions printed on the subsequent pages of this question paper until instructed that you may do so by the Invigilator

1 A model crankshaft is represented by a uniform wire of mass $10m$ and length $10a$ as shown in Fig. 1. The x, y, z coordinates of each segment of wire with respect to the origin O are as follows:

	A	B	C	D	E	J	K	L	M	N
x	0	0	0	0	0	0	a	a	0	0
y	$-3a$	$-2a$	$-2a$	$-a$	$-a$	a	a	$2a$	$2a$	$3a$
z	0	0	a	a	0	0	0	0	0	0

The centre of mass G of the model is at $\frac{a}{5}(1,0,1)$ and the inertia matrix I_O for the model in the reference frame $Oxyz$ is

$$I_O = \frac{ma^2}{3} \begin{bmatrix} 89 & * & * \\ -9 & * & 9 \\ * & * & 89 \end{bmatrix}.$$

- (a) Find the missing entries of I_O (i.e. those indicated *). [30%]
- (b) Show that one of the principal axes of inertia through O is $(1,0,1)$. [20%]
- (c) Find the inertia matrix for the model at G in the reference frame $Gxyz$. [40%]
- (d) Find any one of the principal moments of inertia at G . [10%]

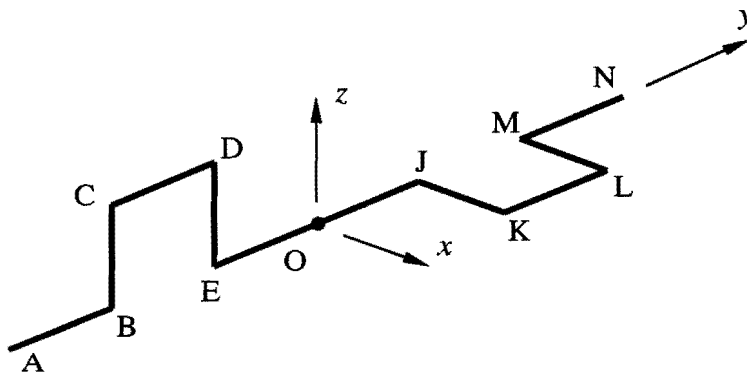


Fig. 1

2 Cuspidal nutation of a gyroscopic pendulum is studied using a symmetrical rotor of mass m as shown in the side elevations in Fig. 2. The rotor has principal moments of inertia AAC about axes passing through the fixed pivot O . The distance from O to the centre of mass G of the rotor is a . The angle between OG and the horizontal is α and the rate of rotation of OG as viewed from above is $\dot{\phi}$ as shown in Fig. 2(b). The rotor is spinning at a steady 'fast' rate ω . Initially the rotor is held with its axis horizontal (ie with $\alpha = 0$) as shown in Fig. 2(a) and it is then released from rest. Cuspidal nutation then occurs during which motion the angle α remains small. After some time the oscillations die out and the rotor exhibits steady-state precession.

- (a) Sketch the variation of α with time
- (i) assuming no loss of mechanical energy; [15%]
(ii) allowing for some energy loss due to friction. [15%]
- (b) Use conservation of moment of momentum about the vertical axis to show that $A\dot{\phi} \approx C\omega\alpha$ throughout the motion. [10%]
- (c) Show that $\alpha \approx \frac{mgaA}{C^2\omega^2}$ during steady-state precession. [20%]
- (d) Use conservation of mechanical energy to estimate the maximum value of α reached during the cuspidal motion. [40%]

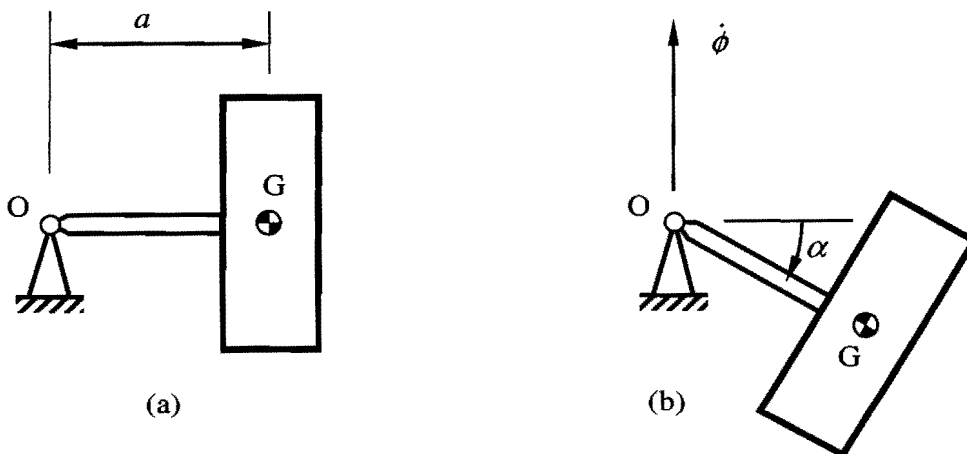


Fig. 2

(TURN OVER)

3 (a) A solid cylinder of mass m , diameter d , and length l is fixed through its centre of mass G to a rigid shaft. The shaft makes angle α to the cylinder axis as shown in Fig. 3(a) and rotates with constant angular velocity Ω in bearings a distance L apart.

- (i) Show that two of the principal moments of inertia of the cylinder at G are equal to $\frac{m}{48}(3d^2 + 4l^2)$. [10%]
- (ii) Find the magnitudes of the rotating bearing reaction forces. [30%]
- (iii) For what value of l are these bearing forces zero for any α ? [10%]

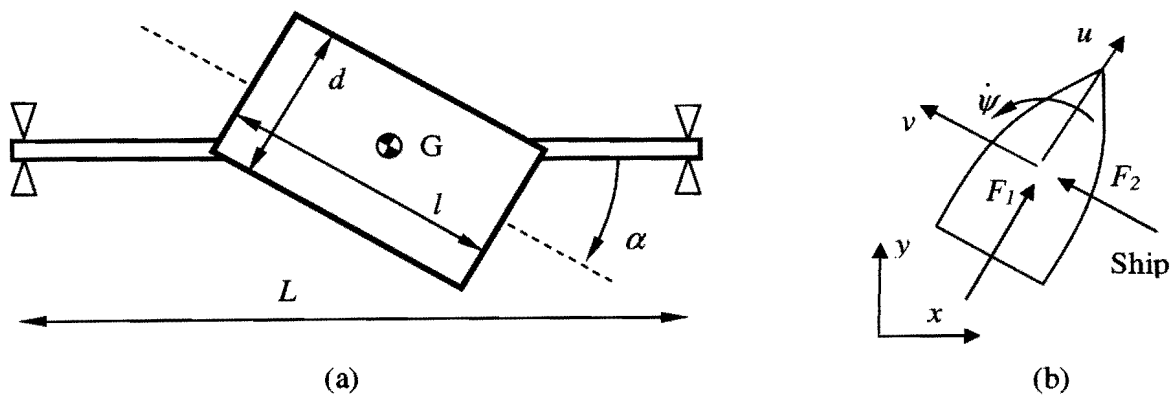


Fig. 3

(b) The centre of gravity of a ship of mass M has a forward velocity u and a velocity to the left v defined in a coordinate system that rotates with the ship as shown in Fig. 3(b). The ship has a yaw velocity (i.e. rotation rate about the vertical axis) of $\dot{\psi}$.

- (i) If the total external forces acting on the ship in the forward and left directions are F_1 and F_2 respectively, show from fundamental principles that the equations of motion of the ship in the forward and left directions are

$$M(\dot{u} - v\dot{\psi}) = F_1 \quad \text{and} \quad M(\dot{v} + u\dot{\psi}) = F_2 \quad [20\%]$$

- (ii) Explain why these equations *cannot* be derived from Lagrange's equations by simply defining generalised coordinates q_1 and q_2 with $\dot{q}_1 = u$ and $\dot{q}_2 = v$. [10%]
- (iii) Using space-fixed Cartesian coordinates x and y proceed to derive the equations of motion by using Lagrange's equations. [20%]

4 A simplified model of a wind turbine blade is shown in Fig. 4. The blade model is composed of two massless rigid links AB and BC of lengths a and b , respectively and a lumped mass M is located at C. The blade moves in the vertical plane with two degrees of freedom θ and β . The two pin joints at A and B have no rotational stiffness or damping.

(a) By using Lagrange's equation, derive the equations of motion for large amplitude motion of the system. Include the effects of gravity and a shaft torque at A, but do not consider aerodynamic forces. [40%]

(b) The system is forced to rotate so that θ varies at a constant rate, i.e. $\dot{\theta} = \Omega$, where Ω is a constant and $\Omega^2 \gg g/a$. Show that the natural frequency is given approximately by

$$\omega_n^2 = \Omega \sqrt{a/b} \quad [20\%]$$

(c) In the absence of forcing the system hangs vertically with $\theta = -\pi/2$ and $\beta = 0$. Derive the equations of motion for small amplitude vibrations around this point. Without further calculation, show from physical considerations that there is a mode with an infinite natural frequency, and write down the mode shape for this mode. [40%]

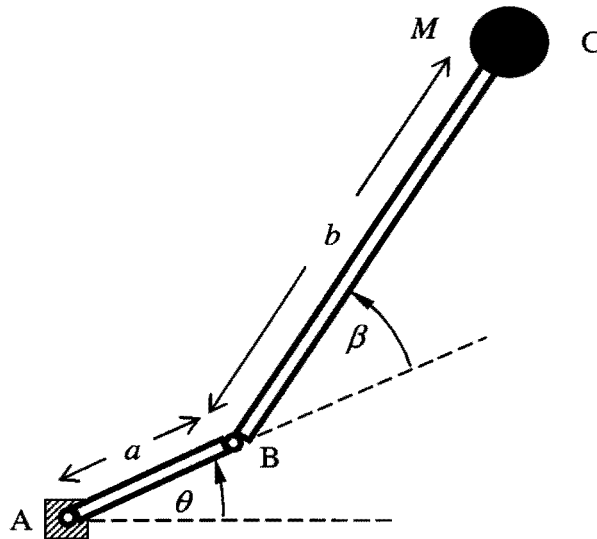


Fig. 4

END OF PAPER

Part IIA Data sheet
Module 3C5 Dynamics
Module 3C6 Vibration

DYNAMICS IN THREE DIMENSIONS

Axes fixed in direction

- (a) Linear momentum for a general collection of particles m_i :

$$\frac{d\mathbf{p}}{dt} = \mathbf{F}^{(e)}$$

where $\mathbf{p} = M \mathbf{v}_G$, M is the total mass, \mathbf{v}_G is the velocity of the centre of mass and $\mathbf{F}^{(e)}$ the total external force applied to the system.

- (b) Moment of momentum about a general point P

$$\begin{aligned} \mathbf{Q}^{(e)} &= (\mathbf{r}_G - \mathbf{r}_P) \times \dot{\mathbf{p}} + \dot{\mathbf{h}}_G \\ &= \dot{\mathbf{h}}_P + \dot{\mathbf{r}}_P \times \mathbf{p} \end{aligned}$$

where $\mathbf{Q}^{(e)}$ is the total moment of external forces about P. Here, \mathbf{h}_P and \mathbf{h}_G are the moments of momentum about P and G respectively, so that for example

$$\begin{aligned} \mathbf{h}_P &= \sum_i (\mathbf{r}_i - \mathbf{r}_P) \times m_i \dot{\mathbf{r}}_i \\ &= \mathbf{h}_G + (\mathbf{r}_G - \mathbf{r}_P) \times \mathbf{p} \end{aligned}$$

where the summation is over all the mass particles making up the system.

- (c) For a rigid body rotating with angular velocity $\boldsymbol{\omega}$ about a fixed point P at the origin of coordinates

$$\mathbf{h}_P = \int \mathbf{r} \times (\boldsymbol{\omega} \times \mathbf{r}) dm = I \boldsymbol{\omega}$$

where the integral is taken over the volume of the body, and where

$$I = \begin{bmatrix} A & -F & -E \\ -F & B & -D \\ -E & -D & C \end{bmatrix}, \quad \boldsymbol{\omega} = \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}, \quad \mathbf{r} = \begin{bmatrix} x \\ y \\ z \end{bmatrix},$$

$$\text{and} \quad \begin{aligned} A &= \int (y^2 + z^2) dm & B &= \int (z^2 + x^2) dm & C &= \int (x^2 + y^2) dm \\ D &= \int yz dm & E &= \int zx dm & F &= \int xy dm \end{aligned}$$

where all integrals are taken over the volume of the body.

Axes rotating with angular velocity $\boldsymbol{\Omega}$

Time derivatives of vectors must be replaced by the "rotating frame" form, so that for example

$$\dot{\mathbf{p}} + \boldsymbol{\Omega} \times \mathbf{p} = \mathbf{F}^{(e)}$$

where the time derivative is evaluated in the moving reference frame.

When the rate of change of the position vector \mathbf{r} is needed, as in 1(b) above, it is usually easiest to calculate velocity components directly in the required directions of the axes. Application of the general formula needs an extra term unless the origin of the frame is fixed.

Euler's dynamic equations (governing the angular motion of a rigid body)

(a) Body-fixed reference frame:

$$A \dot{\omega}_1 - (B - C) \omega_2 \omega_3 = Q_1$$

$$B \dot{\omega}_2 - (C - A) \omega_3 \omega_1 = Q_2$$

$$C \dot{\omega}_3 - (A - B) \omega_1 \omega_2 = Q_3$$

where A , B and C are the principal moments of inertia about P which is either at a fixed point or at the centre of mass. The angular velocity of the body is $\boldsymbol{\omega} = [\omega_1, \omega_2, \omega_3]$ and the moment about P of external forces is $\boldsymbol{Q} = [Q_1, Q_2, Q_3]$ using axes aligned with the principal axes of inertia of the body at P.

(b) Non-body-fixed reference frame for axisymmetric bodies (the "Gyroscope equations"):

$$A \dot{\Omega}_1 - (A \Omega_3 - C \omega_3) \Omega_2 = Q_1$$

$$A \dot{\Omega}_2 + (A \Omega_3 - C \omega_3) \Omega_1 = Q_2$$

$$C \dot{\omega}_3 = Q_3$$

where A , A and C are the principal moments of inertia about P which is either at a fixed point or at the centre of mass. The angular velocity of the body is $\boldsymbol{\omega} = [\omega_1, \omega_2, \omega_3]$ and the moment about P of external forces is $\boldsymbol{Q} = [Q_1, Q_2, Q_3]$ using axes such that ω_3 and Q_3 are aligned with the symmetry axis of the body. The reference frame (not fixed in the body) rotates with angular velocity $\boldsymbol{\Omega} = [\Omega_1, \Omega_2, \Omega_3]$ with $\Omega_1 = \omega_1$ and $\Omega_2 = \omega_2$.

Lagrange's equations

For a holonomic system with generalised coordinates q_i

$$\frac{d}{dt} \left[\frac{\partial T}{\partial \dot{q}_i} \right] - \frac{\partial T}{\partial q_i} + \frac{\partial V}{\partial q_i} = Q_i$$

where T is the total kinetic energy, V is the total potential energy, and Q_i are the non-conservative generalised forces.

VIBRATION MODES AND RESPONSE

Discrete systems

1. The forced vibration of an N -degree-of-freedom system with mass matrix M and stiffness matrix K (both symmetric and positive definite) is

$$M \ddot{\underline{y}} + K \underline{y} = \underline{f}$$

where \underline{y} is the vector of generalised displacements and \underline{f} is the vector of generalised forces.

2. Kinetic energy

$$T = \frac{1}{2} \dot{\underline{y}}^t M \dot{\underline{y}}$$

Potential energy

$$V = \frac{1}{2} \underline{y}^t K \underline{y}$$

3. The natural frequencies ω_n and corresponding mode shape vectors $\underline{u}^{(n)}$ satisfy

$$K \underline{u}^{(n)} = \omega_n^2 M \underline{u}^{(n)}.$$

4. Orthogonality and normalisation

$$\underline{u}^{(j)t} M \underline{u}^{(k)} = \begin{cases} 0, & j \neq k \\ 1, & j = k \end{cases}$$

$$\underline{u}^{(j)t} K \underline{u}^{(k)} = \begin{cases} 0, & j \neq k \\ \omega_n^2, & j = k \end{cases}$$

5. General response

The general response of the system can be written as a sum of modal responses

$$\underline{y}(t) = \sum_{j=1}^N q_j(t) \underline{u}^{(j)} = U \underline{q}(t)$$

where U is a matrix whose N columns are the normalised eigenvectors $\underline{u}^{(j)}$ and q_j can be thought of as the "quantity" of the j th mode.

Continuous systems

The forced vibration of a continuous system is determined by solving a partial differential equation: see p. 6 for examples.

$$T = \frac{1}{2} \int \dot{u}^2 dm$$

where the integral is with respect to mass (similar to moments and products of inertia).

See p. 4 for examples.

The natural frequencies ω_n and mode shapes $u_n(x)$ are found by solving the appropriate differential equation (see p. 4) and boundary conditions, assuming harmonic time dependence.

$$\int u_j(x) u_k(x) dm = \begin{cases} 0, & j \neq k \\ 1, & j = k \end{cases}$$

The general response of the system can be written as a sum of modal responses

$$w(x,t) = \sum_j q_j(t) u_j(x)$$

where $w(x,t)$ is the displacement and q_j can be thought of as the "quantity" of the j th mode.

6. Modal coordinates q satisfy

$$\ddot{q} + [\text{diag}(\omega_j^2)] q = \underline{Q}$$

where $\underline{y} = Uq$ and the modal force vector

$$\underline{Q} = U^t \underline{f}.$$

7. Frequency response function

For input generalised force f_j at frequency ω and measured generalised displacement y_k the transfer function is

$$H(j,k,\omega) = \frac{y_k}{f_j} = \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n^2 - \omega^2}$$

(with no damping), or

$$H(j,k,\omega) = \frac{y_k}{f_j} \approx \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n^2 + 2i\omega\omega_n\zeta_n - \omega^2}$$

(with small damping) where the damping factor ζ_n is as in the Mechanics Data Book for one-degree-of-freedom systems.

8. Pattern of antiresonances

For a system with well-separated resonances (low modal overlap), if the factor $u_j^{(n)} u_k^{(n)}$ has the same sign for two adjacent resonances then the transfer function will have an antiresonance between the two peaks. If it has opposite sign, there will be no antiresonance.

9. Impulse response

For a unit impulsive generalised force $f_j = \delta(t)$ the measured response y_k is given by

$$g(j,k,t) = y_k(t) = \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n} \sin \omega_n t$$

for $t \geq 0$ (with no damping), or

$$g(j,k,t) \approx \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n} \sin \omega_n t e^{-\omega_n \zeta_n t}$$

for $t \geq 0$ (with small damping).

Each modal amplitude $q_j(t)$ satisfies

$$\ddot{q}_j + \omega_j^2 q_j = Q_j$$

where $Q_j = \int f(x,t) u_j(x) dm$ and $f(x,t)$ is the external applied force distribution.

For force F at frequency ω applied at point x , and displacement w measured at point y , the transfer function is

$$H(x,y,\omega) = \frac{w}{F} = \sum_n \frac{u_n(x) u_n(y)}{\omega_n^2 - \omega^2}$$

(with no damping), or

$$H(x,y,\omega) = \frac{w}{F} \approx \sum_n \frac{u_n(x) u_n(y)}{\omega_n^2 + 2i\omega\omega_n\zeta_n - \omega^2}$$

(with small damping) where the damping factor ζ_n is as in the Mechanics Data Book for one-degree-of-freedom systems.

For a system with low modal overlap, if the factor $u_n(x) u_n(y)$ has the same sign for two adjacent resonances then the transfer function will have an antiresonance between the two peaks. If it has opposite sign, there will be no antiresonance.

For a unit impulse applied at $t = 0$ at point x , the response at point y is

$$g(x,y,t) = \sum_n \frac{u_n(x) u_n(y)}{\omega_n} \sin \omega_n t$$

for $t \geq 0$ (with no damping), or

$$g(x,y,t) \approx \sum_n \frac{u_n(x) u_n(y)}{\omega_n} \sin \omega_n t e^{-\omega_n \zeta_n t}$$

for $t \geq 0$ (with small damping).

10. Step response

For a unit step generalised force

$f_j = \begin{cases} 0 & t < 0 \\ 1 & t \geq 0 \end{cases}$ the measured response y_k is given by

$$h(j,k,t) = y_k(t) = \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n^2} [1 - \cos \omega_n t]$$

for $t \geq 0$ (with no damping), or

$$h(j,k,t) = \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n^2} [1 - \cos \omega_n t e^{-\omega_n \zeta_n t}]$$

for $t \geq 0$ (with small damping).

For a unit step force applied at $t = 0$ at point x , the response at point y is

$$h(x,y,t) = \sum_n \frac{u_n(x) u_n(y)}{\omega_n^2} [1 - \cos \omega_n t]$$

for $t \geq 0$ (with no damping), or

$$h(t) = \sum_n \frac{u_n(x) u_n(y)}{\omega_n^2} [1 - \cos \omega_n t e^{-\omega_n \zeta_n t}]$$

for $t \geq 0$ (with small damping).

Rayleigh's principle for small vibrations

The "Rayleigh quotient" for a discrete system is $\frac{V}{T} = \frac{\underline{y}^t K \underline{y}}{\underline{y}^t M \underline{y}}$ where \underline{y} is the vector of generalised coordinates, M is the mass matrix and K is the stiffness matrix. The equivalent quantity for a continuous system is defined using the energy expressions on p. 6.

If this quantity is evaluated with any vector \underline{y} , the result will be

- (1) \geq the smallest squared frequency;
- (2) \leq the largest squared frequency;
- (3) a good approximation to ω_k^2 if \underline{y} is an approximation to $\underline{u}^{(k)}$.

(Formally, $\frac{V}{T}$ is *stationary* near each mode.)

GOVERNING EQUATIONS FOR CONTINUOUS SYSTEMS

Transverse vibration of a stretched string

Tension P , mass per unit length m , transverse displacement $w(x,t)$, applied lateral force $f(x,t)$ per unit length.

$$\begin{array}{l} \text{Equation of motion} \\ m \frac{\partial^2 w}{\partial t^2} - P \frac{\partial^2 w}{\partial x^2} = f(x,t) \end{array}$$

$$\begin{array}{l} \text{Potential energy} \\ V = \frac{1}{2} P \int \left(\frac{\partial w}{\partial x} \right)^2 dx \end{array}$$

$$\begin{array}{l} \text{Kinetic energy} \\ T = \frac{1}{2} m \int \left(\frac{\partial w}{\partial t} \right)^2 dx \end{array}$$

Torsional vibration of a circular shaft

Shear modulus G , density ρ , external radius a , internal radius b if shaft is hollow, angular displacement $\theta(x,t)$, applied torque $f(x,t)$ per unit length.

Polar moment of area is $J = (\pi/2)(a^4 - b^4)$.

$$\begin{array}{l} \text{Equation of motion} \\ \rho J \frac{\partial^2 \theta}{\partial t^2} - GJ \frac{\partial^2 \theta}{\partial x^2} = f(x,t) \end{array}$$

$$\begin{array}{l} \text{Potential energy} \\ V = \frac{1}{2} GJ \int \left(\frac{\partial \theta}{\partial x} \right)^2 dx \end{array}$$

$$\begin{array}{l} \text{Kinetic energy} \\ T = \frac{1}{2} \rho J \int \left(\frac{\partial \theta}{\partial t} \right)^2 dx \end{array}$$

Axial vibration of a rod or column

Young's modulus E , density ρ , cross-sectional area A , axial displacement $w(x,t)$, applied axial force $f(x,t)$ per unit length.

$$\begin{array}{l} \text{Equation of motion} \\ \rho A \frac{\partial^2 w}{\partial t^2} - EA \frac{\partial^2 w}{\partial x^2} = f(x,t) \end{array}$$

$$\begin{array}{l} \text{Potential energy} \\ V = \frac{1}{2} EA \int \left(\frac{\partial w}{\partial x} \right)^2 dx \end{array}$$

$$\begin{array}{l} \text{Kinetic energy} \\ T = \frac{1}{2} \rho A \int \left(\frac{\partial w}{\partial t} \right)^2 dx \end{array}$$

Bending vibration of an Euler beam

Young's modulus E , density ρ , cross-sectional area A , second moment of area of cross-section I , transverse displacement $w(x,t)$, applied transverse force $f(x,t)$ per unit length.

$$\begin{array}{l} \text{Equation of motion} \\ \rho A \frac{\partial^2 w}{\partial t^2} + EI \frac{\partial^4 w}{\partial x^4} = f(x,t) \end{array}$$

$$\begin{array}{l} \text{Potential energy} \\ V = \frac{1}{2} EI \int \left(\frac{\partial^2 w}{\partial x^2} \right)^2 dx \end{array}$$

$$\begin{array}{l} \text{Kinetic energy} \\ T = \frac{1}{2} \rho A \int \left(\frac{\partial w}{\partial t} \right)^2 dx \end{array}$$

Note that values of I can be found in the Mechanics Data Book.